

Board to Board

pitch 1.00x1.45mm (0.039"x0.057") | Female | S.M.T.

CBCC201 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.


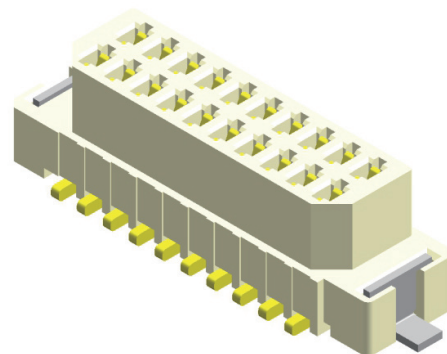


Mating with






B01

B03

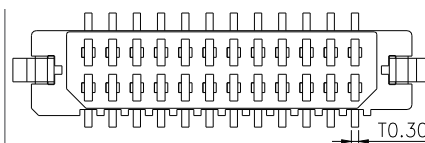

Recommended P.C.Board Layout

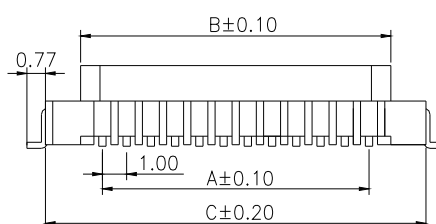

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information				No. of Pins/Row	Dimension Information			
	A	B	C	D		A	B	C	D
03	2.00	3.80	6.70	8.25	11	10.00	11.80	14.70	16.25
04	3.00	4.80	7.70	9.25	12	11.00	12.80	15.70	17.25
05	4.00	5.80	8.70	10.25	13	12.00	13.80	16.70	18.25
06	5.00	6.80	9.70	11.25	14	13.00	14.80	17.70	19.25
07	6.00	7.80	10.70	12.25	15	14.00	15.80	18.70	20.25
08	7.00	8.80	11.70	13.25					
09	8.00	9.80	12.70	14.25					
10	9.00	10.80	13.70	15.25					

Ordering Information

CBCC2

XX

Height Option (H) Standard

01

- XX

No. of Pins per Row

03

1

15

XX

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

Standard Packaging : Tube

A001REAC