

Female Header

pitch 1.00mm (0.039") | Single row | S.M.T. | Locating peg

CSCC211 Series


Specifications

Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C



Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 LCP


All materials must meet Greenconn's requirements for environmental protection.

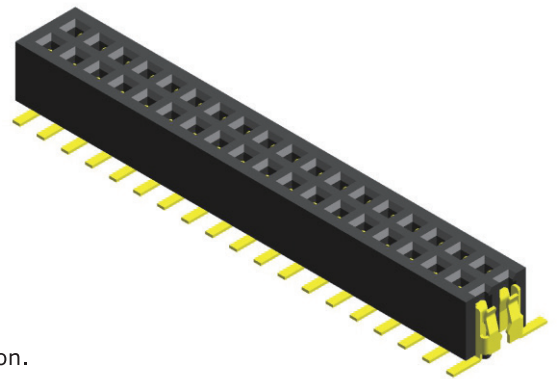

Mating with

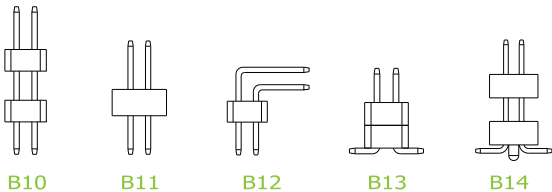

P.S. : Suggested mating pin length : 1.5 ~1.9 mm

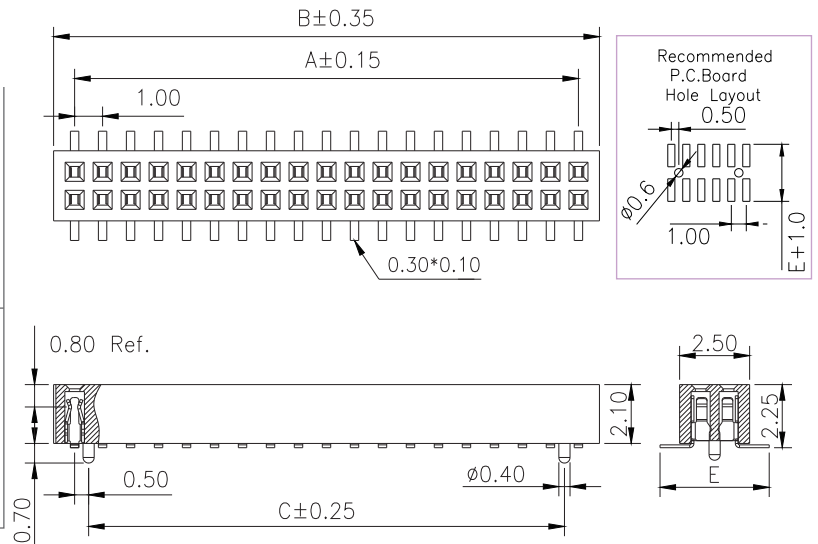

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	1.00	2.50		11	10.00	11.50	9.00	21	20.00	21.50	19.00	31	30.00	31.50	29.00
03	2.00	3.50	1.00	12	11.00	12.50	10.00	22	21.00	22.50	20.00	32	31.00	32.50	30.00
04	3.00	4.50	2.00	13	12.00	13.50	11.00	23	22.00	23.50	21.00	33	32.00	33.50	31.00
05	4.00	5.50	3.00	14	13.00	14.50	12.00	24	23.00	24.50	22.00	34	33.00	34.50	32.00
06	5.00	6.50	4.00	15	14.00	15.50	13.00	25	24.00	25.50	23.00	35	34.00	35.50	33.00
07	6.00	7.50	5.00	16	15.00	16.50	14.00	26	25.00	26.50	24.00	36	35.00	36.50	34.00
08	7.00	8.50	6.00	17	16.00	17.50	15.00	27	26.00	27.50	25.00	37	36.00	37.50	35.00
09	8.00	9.50	7.00	18	17.00	18.50	16.00	28	27.00	28.50	26.00	38	37.00	38.50	36.00
10	9.00	10.50	8.00	19	18.00	19.50	17.00	29	28.00	29.50	27.00	39	38.00	39.50	37.00
				20	19.00	20.50	18.00	30	29.00	30.50	28.00	40	39.00	40.50	38.00

Ordering Information

Standard Packaging : Tube

CSCC2 - C1AC
 Height Option (H) Standard No. of Pins per Row Standard Plating : Gold Flash Pin Length (E) : E=3.90
 Selective Plating : Tin For special length requirement Please contact our sales personnel