

Female Header

pitch 1.27x2.45mm (0.05"x0.1") | Dual row | Dip

CSEA201 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

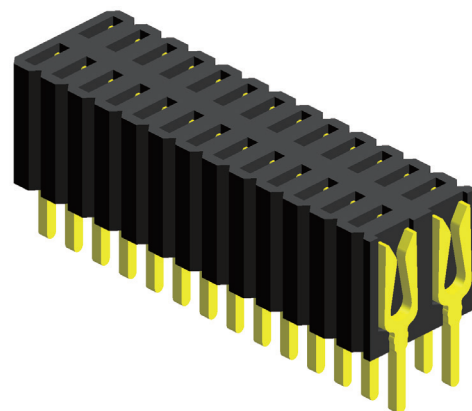

Mating with

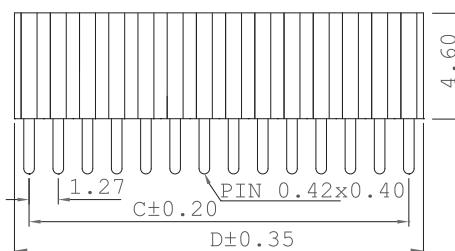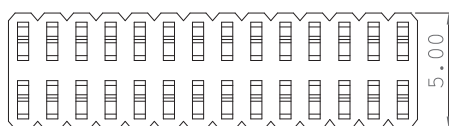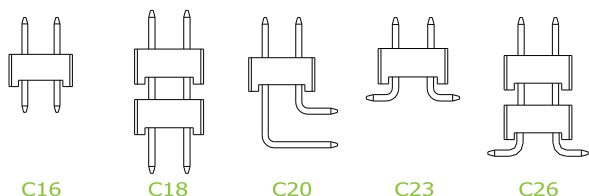

Recommended
P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		
	C	D	
03	2.54	3.81	
04	3.81	5.08	
05	5.08	6.35	
06	6.35	7.62	
07	7.62	8.89	
08	8.89	10.16	
09	10.16	11.43	
10	11.43	12.70	
11	12.70	13.97	
12	13.97	15.24	
13	15.24	16.51	

No. of Pins/Row	Dimension Information		
	C	D	
14	16.51	17.78	
15	17.78	19.05	
16	19.05	20.32	
17	20.32	21.59	
18	21.59	22.86	
19	22.86	24.13	
20	24.13	25.40	
21	25.40	26.67	
22	26.67	27.94	
23	27.94	29.21	
24	29.21	30.48	
25	30.48	31.75	
26	31.75	33.02	

No. of Pins/Row	Dimension Information		
	C	D	
27	33.02	34.29	
28	34.29	35.56	
29	35.56	36.83	
30	36.83	38.10	
31	38.10	39.37	
32	39.37	40.64	
33	40.64	41.91	
34	41.91	43.18	
35	43.18	44.45	
36	44.45	45.72	
37	45.72	46.99	
38	46.99	48.26	
39	48.26	49.53	

No. of Pins/Row	Dimension Information		
	C	D	
40	49.53	50.80	
41	50.80	52.07	
42	52.07	53.34	
43	53.34	54.61	
44	54.61	55.88	
45	55.88	57.15	
46	57.15	57.42	
47	57.42	59.69	
48	59.69	60.96	
49	60.96	62.23	
50	62.23	63.50	

Ordering Information

CSEA2

XX

Height Option (H) Standard

01

- XX

No. of Pins per Row

03

1

50

XX

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

X

XXX

C1AC

A Pin Length (B)

001 : B=2.40

003 : B=3.00

005 : B=2.00

For special length requirement
Please contact our sales personnel