

Female Header

pitch 1.27mm (0.05") | Dual row | Dip | Polarization

CSEA230 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

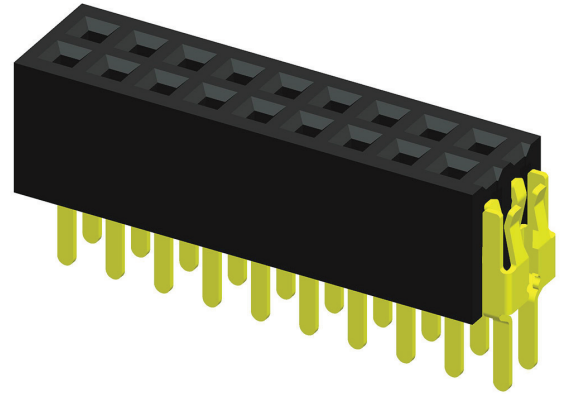



Mating with

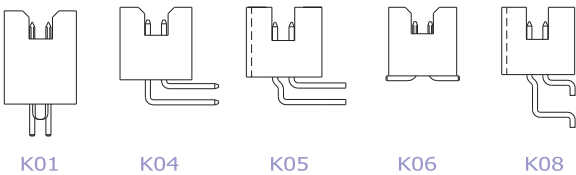

P.S. : Suggested mating pin length : 2.0 ~ 3.2 mm

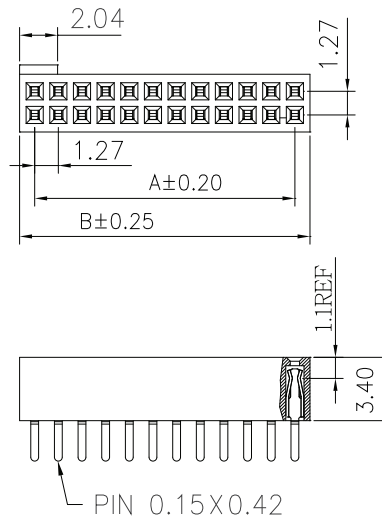

Recommended
P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
03	2.54	4.16		14	16.51	18.13		27	33.02	34.64		40	49.53	51.15	
04	3.81	5.43		15	17.78	19.40		28	34.29	35.91		41	50.80	52.42	
05	5.08	6.70		16	19.05	20.67		29	35.56	37.18		42	52.07	53.69	
06	6.35	7.97		17	20.32	21.94		30	36.83	38.45		43	53.34	54.96	
07	7.62	9.24		18	21.59	23.21		31	38.10	39.72		44	54.61	56.23	
08	8.89	10.51		19	22.86	24.48		32	39.37	40.99		45	55.88	57.50	
09	10.16	11.78		20	24.13	25.75		33	40.64	42.26		46	57.15	58.77	
10	11.43	13.05		21	25.40	27.02		34	41.91	43.53		47	57.42	60.04	
11	12.70	14.32		22	26.67	28.29		35	43.18	44.80		48	59.69	61.31	
12	13.97	15.59		23	27.94	29.56		36	44.45	46.07		49	60.96	62.58	
13	15.24	16.86		24	29.21	30.83		37	45.72	47.34		50	62.23	63.85	
				25	30.48	32.10		38	46.99	48.61					
				26	31.75	33.37		39	48.26	49.88					

Ordering Information

CSEA2	XX	-	XX	XX	XX	X	XXX	C1AA
	Height Option (H)		No. of Pins per Row	Standard Plating		A	Pin Length (C / D)	
	30 : H=3.40		03	02 : Gold Flash		001		
			50	Selective Plating			For special length requirement Please contact our sales personnel	
				01 : Tin				
				05 : Gold Flash / Tin				