

Female Header

pitch 1.27mm (0.05") | Single row | R/A

CSEB102 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP


All materials must meet Greenconn's requirements for environmental protection.

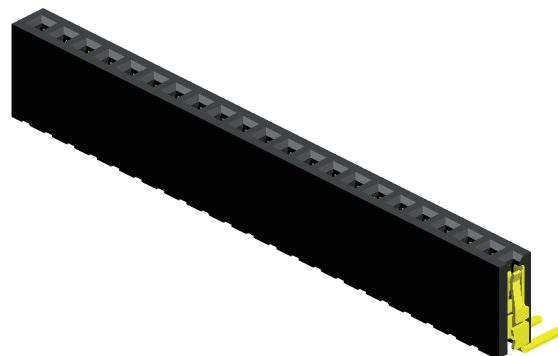


Mating with




C08




C10




C12






C13



C14



C15

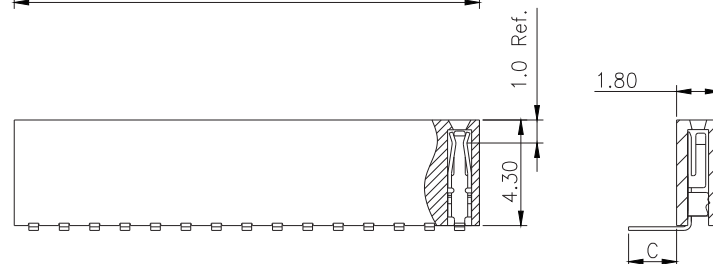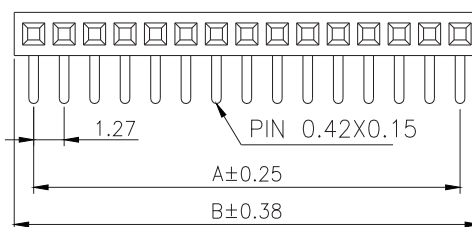

P.S. : Suggested mating pin length : 2.0 ~ 4.0 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information	A	B	No. of Pins/Row	Dimension Information	A	B	No. of Pins/Row	Dimension Information	A	B	No. of Pins/Row	Dimension Information	A	B
02	1.27	2.94		11	12.70	14.32		21	25.40	27.02		31	38.10	39.72	
03	2.54	4.16		12	13.97	15.59		22	26.67	28.29		32	39.37	40.99	
04	3.81	5.43		13	15.24	16.86		23	27.94	29.56		33	40.64	42.26	
05	5.08	6.70		14	16.51	18.13		24	29.21	30.83		34	41.91	43.53	
06	6.35	7.97		15	17.78	19.40		25	30.48	32.10		35	43.18	44.80	
07	7.62	9.24		16	19.05	20.67		26	31.75	33.37		36	44.45	46.07	
08	8.89	10.51		17	20.32	21.94		27	33.02	34.64		37	45.72	47.34	
09	10.16	11.78		18	21.59	23.21		28	34.29	35.91		38	46.99	48.61	
10	11.43	13.05		19	22.86	24.48		29	35.56	37.18		39	48.26	49.88	
				20	24.13	25.75		30	36.83	38.45		40	49.53	51.15	

Ordering Information

Standard Packaging : Tube

CSEB1	XX	-	XX	XX	X	XXX	C1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	A	Pin Length (C)	
	02		02	01 : Tin		001 : C=2.00	
			40	02 : Gold Flash			
				Selective Plating			
				05 : Gold Flash / Tin			

For special length requirement
Please contact our sales personnel