

Female Header

pitch 1.27mm (0.05") | Dual row | R/A

CSEB214 Series


Specifications

Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C


Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

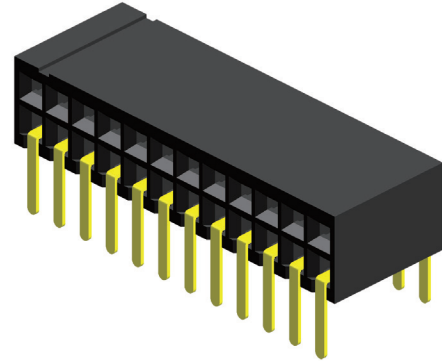

Mating with

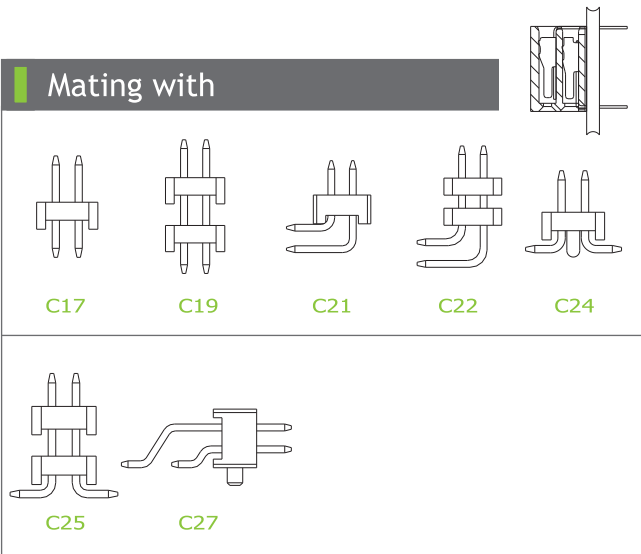

P.S. : Suggested mating pin length : 2.0 ~ 5.0 mm

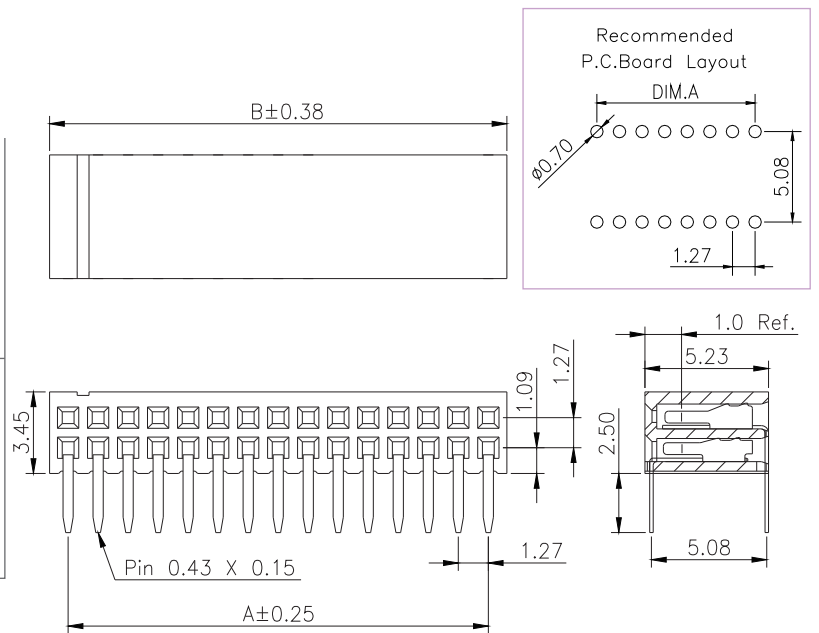

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.27	2.84		11	12.70	14.27		21	25.40	26.97		31	38.10	39.67	
03	2.54	4.11		12	13.97	15.54		22	26.67	28.24		32	39.37	40.94	
04	3.81	5.38		13	15.24	16.81		23	27.94	29.51		33	40.64	42.21	
05	5.08	6.65		14	16.51	18.08		24	29.21	30.78		34	41.91	43.48	
06	6.35	7.92		15	17.78	19.35		25	30.48	32.05		35	43.18	44.75	
07	7.62	9.19		16	19.05	20.62		26	31.75	33.32		36	44.45	46.02	
08	8.89	10.46		17	20.32	21.89		27	33.02	34.59		37	45.72	47.29	
09	10.16	11.73		18	21.59	23.16		28	34.29	35.86		38	46.99	48.56	
10	11.43	13.00		19	22.86	24.43		29	35.56	37.13		39	48.26	49.83	
				20	24.13	25.70		30	36.83	38.40		40	49.53	51.10	

Ordering Information

Standard Packaging : Tube

CSEB2 - A002C1AC
 Height Option (H) No. of Pins per Row Standard Plating : Gold Flash
 : Tin
 : Gold Flash / Tin