

Female Header

pitch 1.27x2.45mm (0.05"x0.1") | Dual row | S.M.T. | Locating peg

CSEC212 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP





All materials must meet Greenconn's requirements for environmental protection.

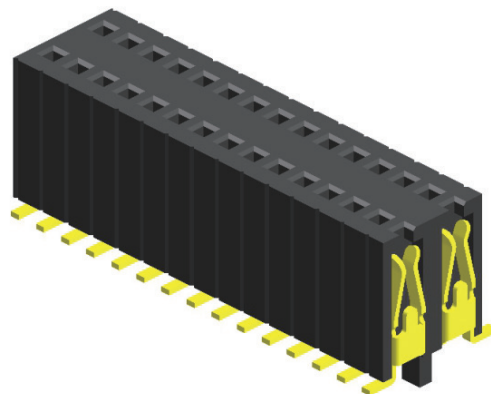

Mating with

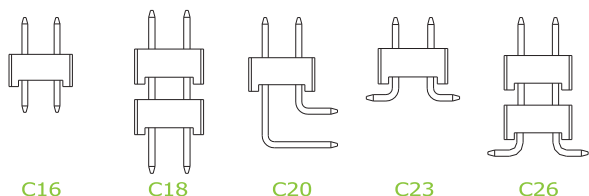

P.S. : Suggested mating pin length : 2.7 ~ 5.5 mm

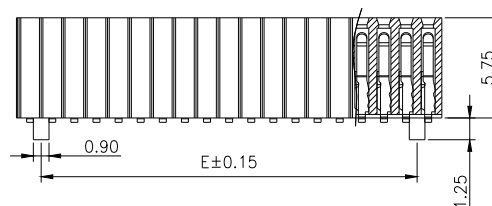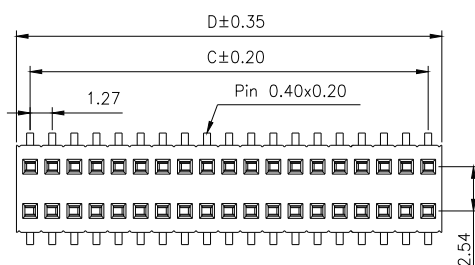

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D	E		C	D	E		C	D	E		C	D	E
03	2.54	4.11	1.27	14	16.51	18.08	15.24	27	33.02	34.59	31.75	40	49.53	51.10	48.26
04	3.81	5.38	2.54	15	17.78	19.35	16.51	28	34.29	35.86	33.02	41	50.80	52.37	49.53
05	5.08	6.65	3.81	16	19.05	20.62	17.78	29	35.56	37.13	34.29	42	52.07	53.64	50.80
06	6.35	7.92	5.08	17	20.32	21.89	19.05	30	36.83	38.40	35.56	43	53.34	54.91	52.07
07	7.62	9.19	6.35	18	21.59	23.16	20.32	31	38.10	39.67	36.83	44	54.61	56.18	53.34
08	8.89	10.46	7.62	19	22.86	24.43	21.59	32	39.37	40.94	38.10	45	55.88	57.45	54.61
09	10.16	11.73	8.89	20	24.13	25.70	22.86	33	40.64	42.21	39.37	46	57.15	58.72	55.88
10	11.43	13.00	10.16	21	25.40	26.97	24.13	34	41.91	43.48	40.64	47	57.42	59.99	57.15
11	12.70	14.27	11.43	22	26.67	28.24	25.40	35	43.18	44.75	41.91	48	59.69	61.26	57.42
12	13.97	15.54	12.70	23	27.94	29.51	26.67	36	44.45	46.02	43.18	49	60.96	62.53	59.69
13	15.24	16.81	13.97	24	29.21	30.78	27.94	37	45.72	47.29	44.45	50	62.23	63.80	60.96
				25	30.48	32.05	29.21	38	46.99	48.56	45.72				
				26	31.75	33.32	30.48	39	48.26	49.83	46.99				

Ordering Information

CSEC2

Height Option (H) Standard

-

No. of Pins per Row

}

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

C1AC

Pin Length (W)

: W=6.40

For special length requirement
Please contact our sales personnel