

Female Header

pitch 2.00mm (0.079") | Single row | Dip

CSFA103 Series


Specifications

Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C


Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon



All materials must meet Greenconn's requirements for environmental protection

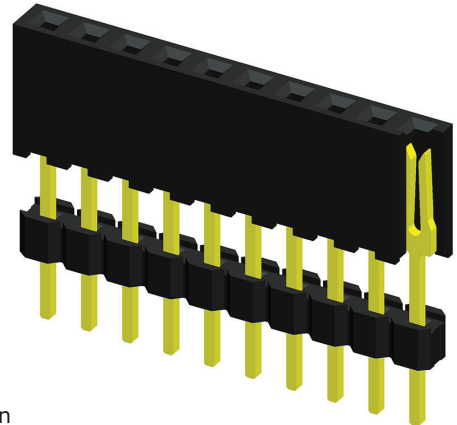

Mating with

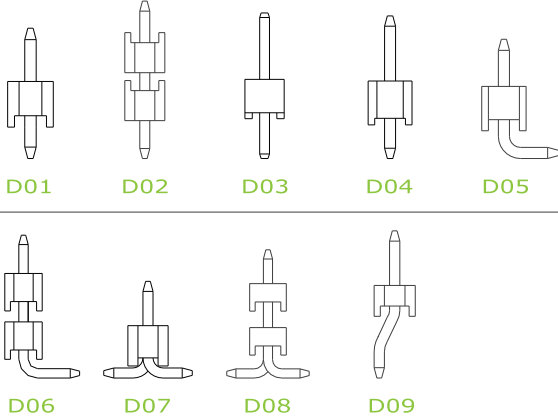

P.S. : Suggested mating pin length : 1.5 ~ 4.9 mm

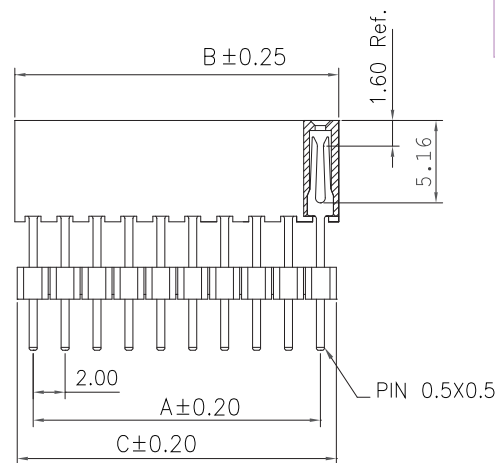

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	2.00	4.30	4.00	11	20.00	22.30	22.00	21	40.00	42.30	42.00	31	60.00	62.30	62.00
03	4.00	6.30	6.00	12	22.00	24.30	24.00	22	42.00	44.30	44.00	32	62.00	64.30	64.00
04	6.00	8.30	8.00	13	24.00	26.30	26.00	23	44.00	46.30	46.00	33	64.00	66.30	66.00
05	8.00	10.30	10.00	14	26.00	28.30	28.00	24	46.00	48.30	48.00	34	66.00	68.30	68.00
06	10.00	12.30	12.00	15	28.00	30.30	30.00	25	48.00	50.30	50.00	35	68.00	70.30	70.00
07	12.00	14.30	14.00	16	30.00	32.30	32.00	26	50.00	52.30	52.00	36	70.00	72.30	72.00
08	14.00	16.30	16.00	17	32.00	34.30	34.00	27	52.00	54.30	54.00	37	72.00	74.30	74.00
09	16.00	18.30	18.00	18	34.00	36.30	36.00	28	54.00	56.30	56.00	38	74.00	76.30	76.00
10	18.00	20.30	20.00	19	36.00	38.30	38.00	29	56.00	58.30	58.00	39	76.00	78.30	78.00
				20	38.00	40.30	40.00	30	58.00	60.30	60.00	40	78.00	80.30	80.00

Ordering Information

CSFA1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1AA
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	Pin Length (D/E/F/G)	
	<input type="checkbox"/> : H=6.35		<input type="checkbox"/>	<input type="checkbox"/> : Gold Flash	<input type="checkbox"/> : D=11.2/E=3.20/F=2.00/G=6.35	
			<input type="checkbox"/>	Selective Plating	<input type="checkbox"/> : D=9.35/E=2.30/F=2.00/G=6.35	
			<input type="checkbox"/>	<input type="checkbox"/> : Tin	For special length requirement Please contact our sales personnel	
			<input type="checkbox"/>	<input type="checkbox"/> : Gold Flash / Tin		

Standard Packaging : Box