

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFA208
CSFA210 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

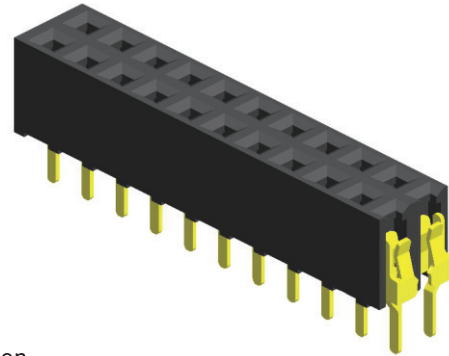

Mating with

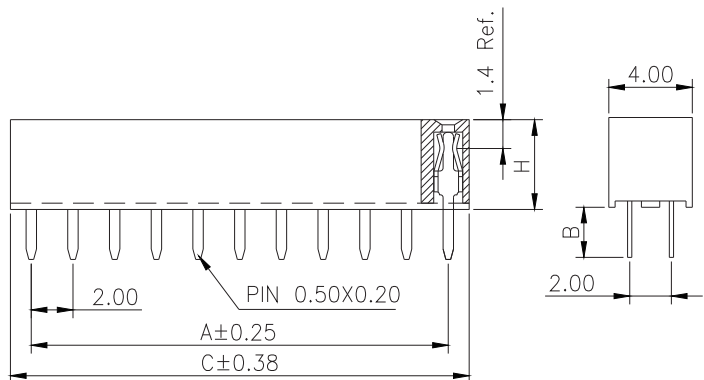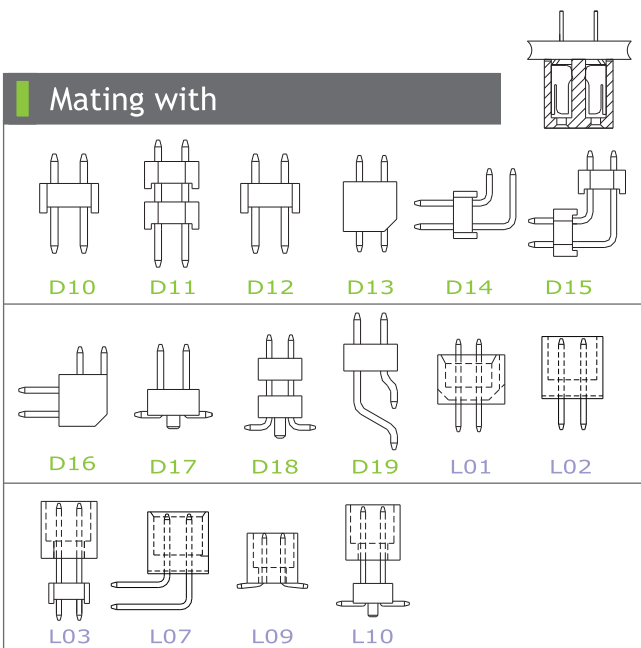

P.S. : Suggested mating pin length : 2.9 ~ 4.0 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C			A	C			A	C			A	C	
03	4.00	6.60		11	20.00	22.60		21	40.00	42.60		31	60.00	62.60	
04	6.00	8.60		12	22.00	24.60		22	42.00	44.60		32	62.00	64.60	
05	8.00	10.60		13	24.00	26.60		23	44.00	46.60		33	64.00	66.60	
06	10.00	12.60		14	26.00	28.60		24	46.00	48.60		34	66.00	68.60	
07	12.00	14.60		15	28.00	30.60		25	48.00	50.60		35	68.00	70.60	
08	14.00	16.60		16	30.00	32.60		26	50.00	52.60		36	70.00	72.60	
09	16.00	18.60		17	32.00	34.60		27	52.00	54.60		37	72.00	74.60	
10	18.00	20.60		18	34.00	36.60		28	54.00	56.60		38	74.00	76.60	
				19	36.00	38.60		29	56.00	58.60		39	76.00	78.60	
				20	38.00	40.60		30	58.00	60.60		40	78.00	80.60	

Ordering Information

CSFA2	XX	-	XX	XX	XX	X	XXX	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating		A	Pin Length (B)	
	08 : H=4.30		03	02 : Gold Flash	CSFA208...A		001 : B=2.40	
	10 : H=4.00		40	Selective Plating	CSFA210...A		001 : B=2.80	
				01 : Tin				For special length requirement Please contact our sales personnel
				05 : Gold Flash / Tin				

Standard Packaging : Tube