


Female Header

pitch 2.00mm (0.079") | Triple row | Dip | Board spacer

CSFA302 Series

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


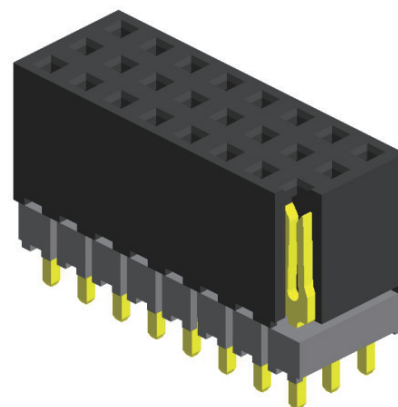


Materials




Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

Mating with



P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

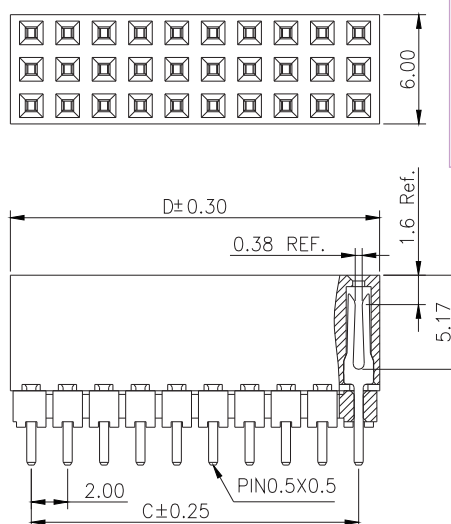

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	2.00	4.30		11	20.00	22.30		21	40.00	42.30		31	60.00	62.30	
03	4.00	6.30		12	22.00	24.30		22	42.00	44.30		32	62.00	64.30	
04	6.00	8.30		13	24.00	26.30		23	44.00	46.30		33	64.00	66.30	
05	8.00	10.30		14	26.00	28.30		24	46.00	48.30		34	66.00	68.30	
06	10.00	12.30		15	28.00	30.30		25	48.00	50.30		35	68.00	70.30	
07	12.00	14.30		16	30.00	32.30		26	50.00	52.30		36	70.00	72.30	
08	14.00	16.30		17	32.00	34.30		27	52.00	54.30		37	72.00	74.30	
09	16.00	18.30		18	34.00	36.30		28	54.00	56.30		38	74.00	76.30	
10	18.00	20.30		19	36.00	38.30		29	56.00	58.30		39	76.00	78.30	
				20	38.00	40.30		30	58.00	60.30		40	78.00	80.30	

Ordering Information

CSFA3	XX	-	XX	XX	X	XXX	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	A	Pin Length (A/B)	
	02		02	02 : Gold Flash		001 : A=8.35 / B=2.08	
			40	Selective Plating		For special length requirement Please contact our sales personnel	
				01 : Tin			
				05 : Gold Flash / Tin			