

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

CSFC206 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon




All materials must meet Greenconn's requirements for environmental protection.

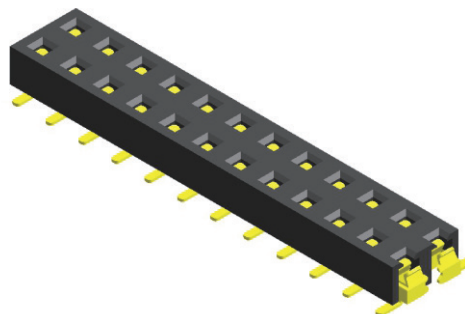

Mating with

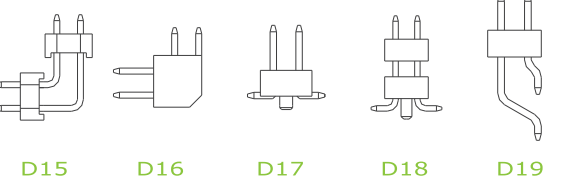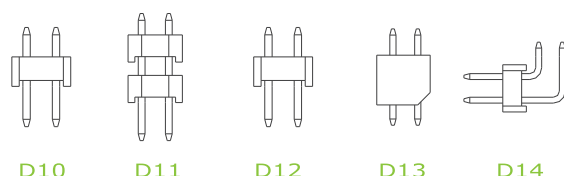

P.S. : Suggested mating pin length : 1.6 ~ 2.0 mm

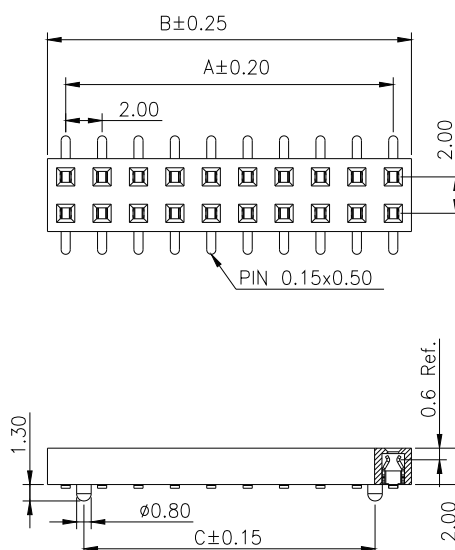

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
03	4.00	6.00	2.00	11	20.00	22.00	18.00	21	40.00	42.00	38.00	31	60.00	62.00	58.00
04	6.00	8.00	4.00	12	22.00	24.00	20.00	22	42.00	44.00	40.00	32	62.00	64.00	60.00
05	8.00	10.00	6.00	13	24.00	26.00	22.00	23	44.00	46.00	42.00	33	64.00	66.00	62.00
06	10.00	12.00	8.00	14	26.00	28.00	24.00	24	46.00	48.00	44.00	34	66.00	68.00	64.00
07	12.00	14.00	10.00	15	28.00	30.00	26.00	25	48.00	50.00	46.00	35	68.00	70.00	66.00
08	14.00	16.00	12.00	16	30.00	32.00	28.00	26	50.00	52.00	48.00	36	70.00	72.00	68.00
09	16.00	18.00	14.00	17	32.00	34.00	30.00	27	52.00	54.00	50.00	37	72.00	74.00	70.00
10	18.00	20.00	16.00	18	34.00	36.00	32.00	28	54.00	56.00	52.00	38	74.00	76.00	72.00
				19	36.00	38.00	34.00	29	56.00	58.00	54.00	39	76.00	78.00	74.00
				20	38.00	40.00	36.00	30	58.00	60.00	56.00	40	78.00	80.00	76.00

Ordering Information

CSFC2	☐ ☐ ☐	-	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating		Pin Length (W)	
	☐ 06		☐ 03	☐ 02 : Gold Flash		☐ 001 : W=6.50	
			☐ 40	Selective Plating		☐ 003 : W=5.10	
				☐ 01 : Tin		For special length requirement Please contact our sales personnel	

Standard Packaging : Tube