

# Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T.

CSFC219 Series


## Specifications

Current Rating : 2.0 Ampere  
 Insulation Resistance : 1000 MΩ Min  
 Dielectric Withstanding : 500V AC  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature : -40°C to +105°C








## Materials

Contact Material : Phosphor Bronze  
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

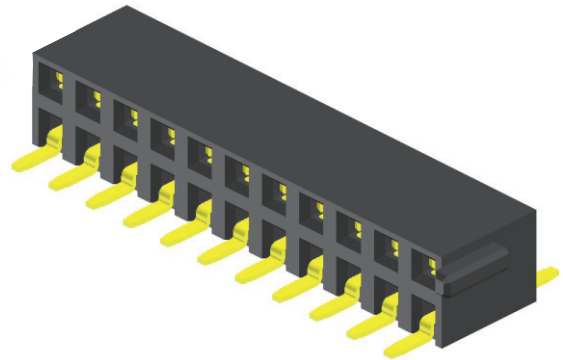

## Mating with

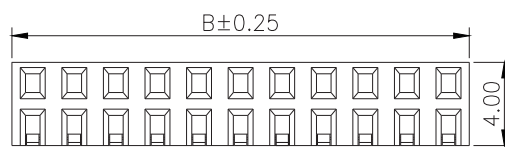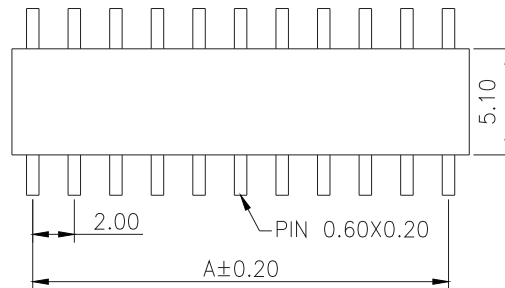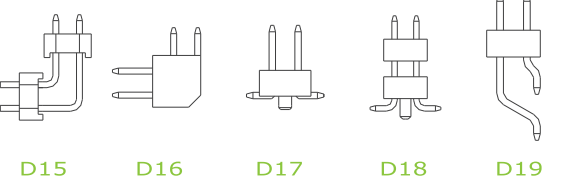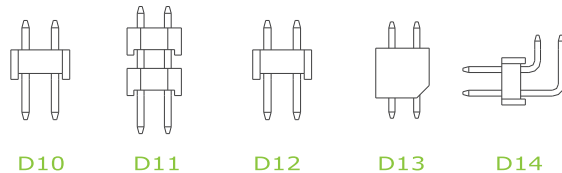

P.S. : Suggested mating pin length : 3.0 ~ 4.8 mm

\* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C
03	4.00	6.00	11	20.00	22.00	21	40.00	42.00
04	6.00	8.00	12	22.00	24.00	22	42.00	44.00
05	8.00	10.00	13	24.00	26.00	23	44.00	46.00
06	10.00	12.00	14	26.00	28.00	24	46.00	48.00
07	12.00	14.00	15	28.00	30.00	25	48.00	50.00
08	14.00	16.00	16	30.00	32.00			
09	16.00	18.00	17	32.00	34.00			
10	18.00	20.00	18	34.00	36.00			
			19	36.00	38.00			
			20	38.00	40.00			

## Ordering Information

Standard Packaging : Tube

CSFC2  -   A001R1AC  
 Height Option (H)  No. of Pins per Row  Standard Plating  : Gold Flash  
 Selective Plating  : Tin  
 : Gold Flash / Tin