

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFF202 Series


Specifications

Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C





Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

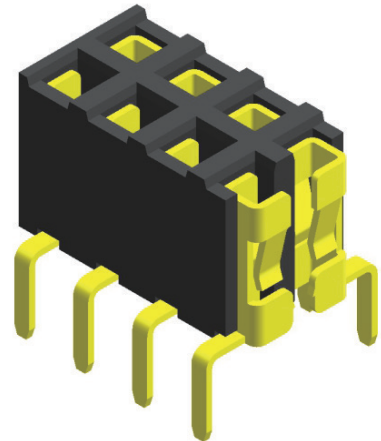

Mating with

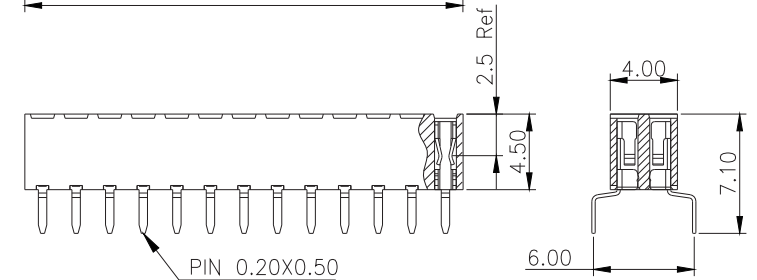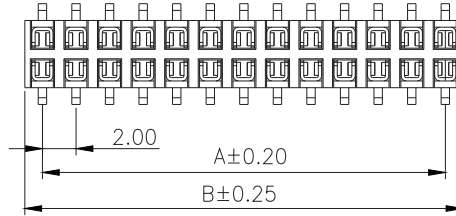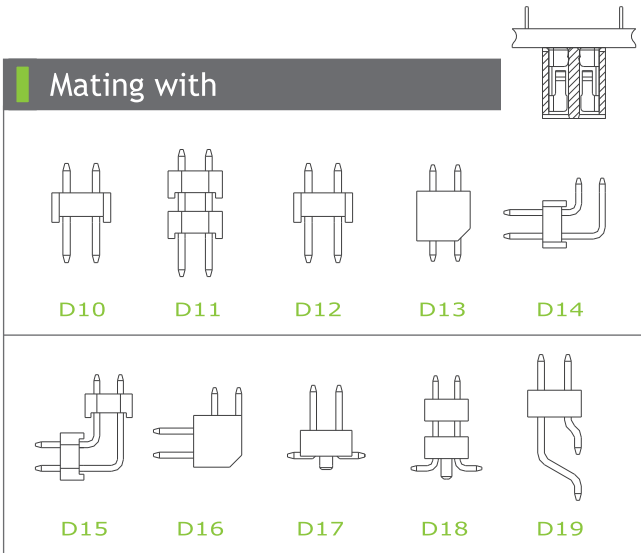

P.S. : Suggested mating pin length : < 4.5 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C			A	C			A	C			A	C	
02	2.00	4.10		11	20.00	22.10		21	40.00	42.10		31	60.00	62.10	
03	4.00	6.10		12	22.00	24.10		22	42.00	44.10		32	62.00	64.10	
04	6.00	8.10		13	24.00	26.10		23	44.00	46.10		33	64.00	66.10	
05	8.00	10.10		14	26.00	28.10		24	46.00	48.10		34	66.00	68.10	
06	10.00	12.10		15	28.00	30.10		25	48.00	50.10		35	68.00	70.10	
07	12.00	14.10		16	30.00	32.10		26	50.00	52.10		36	70.00	72.10	
08	14.00	16.10		17	32.00	34.10		27	52.00	54.10		37	72.00	74.10	
09	16.00	18.10		18	34.00	36.10		28	54.00	56.10		38	74.00	76.10	
10	18.00	20.10		19	36.00	38.10		29	56.00	58.10		39	76.00	78.10	
				20	38.00	40.10		30	58.00	60.10		40	78.00	80.10	

Ordering Information

Standard Packaging : Tube

CSFF2 - A001R1AC
 Height Option (H) No. of Pins per Row Standard Plating : Gold Flash
 : Tin
 : Gold Flash / Tin