

Female Header

pitch 2.54mm (0.1") | Single row | Dip

CSHA108 Series

Specifications


Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials


Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT

All materials must meet Greenconn's requirements for environmental protection.

Mating with

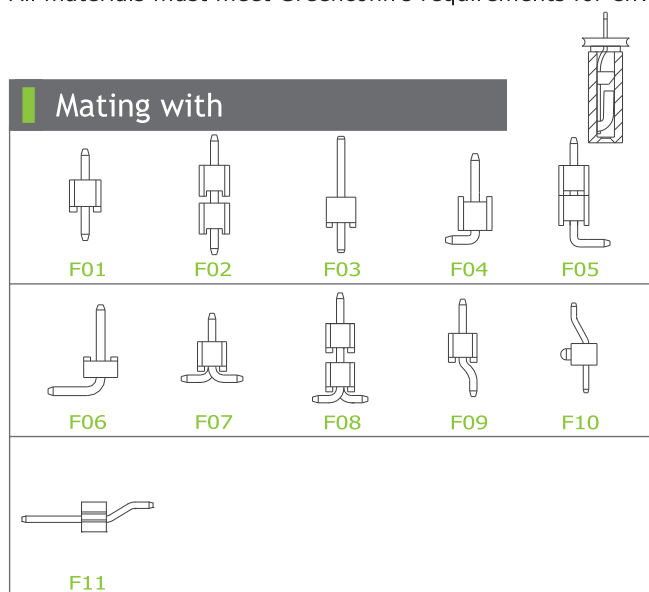

P.S. : Suggested mating pin length : 5.0 ~ 8.0 mm

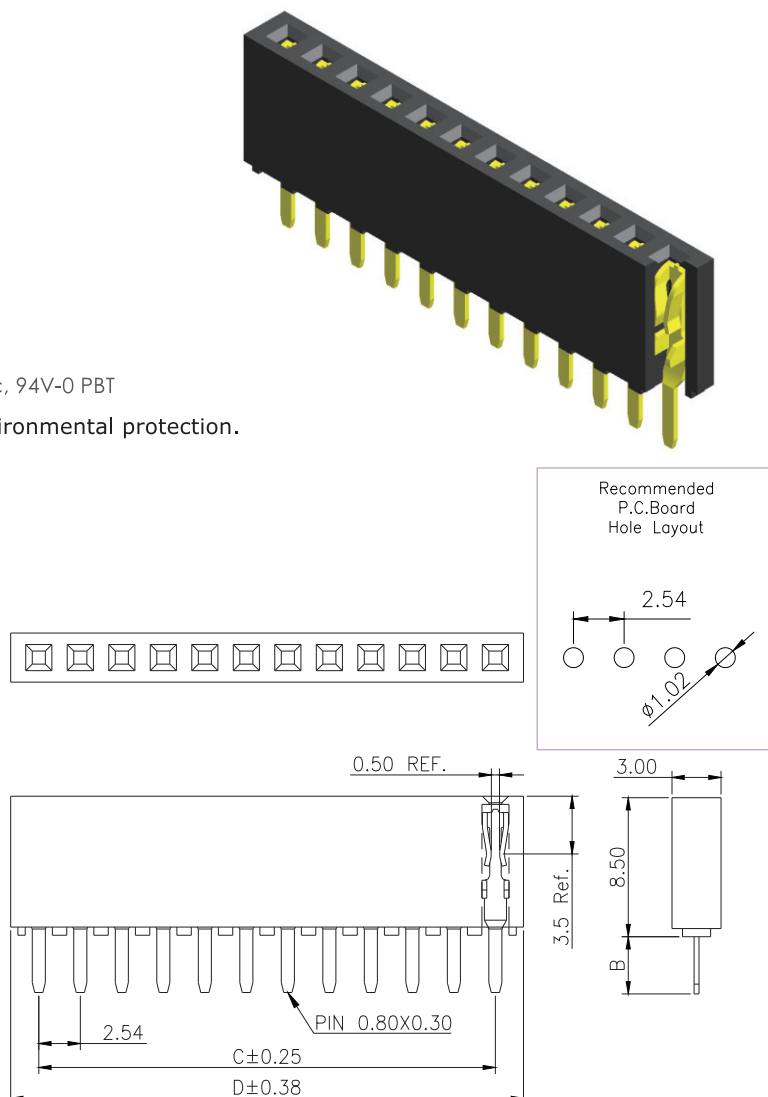

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	2.54	5.88		11	25.40	28.74		21	50.80	54.14		31	76.20	79.54	
03	5.08	8.42		12	27.94	31.28		22	53.34	56.68		32	78.74	82.08	
04	7.62	10.96		13	30.48	33.82		23	55.88	59.22		33	81.28	84.62	
05	10.16	13.50		14	33.02	36.36		24	58.42	61.76		34	83.82	87.16	
06	12.70	16.04		15	35.56	38.90		25	60.96	64.30		35	86.36	89.70	
07	15.24	18.58		16	38.10	41.44		26	63.50	66.84		36	88.90	92.24	
08	17.78	21.12		17	40.64	43.98		27	66.04	69.38		37	91.44	94.78	
09	20.32	23.66		18	43.18	46.52		28	68.58	71.92		38	93.98	97.32	
10	22.86	26.20		19	45.72	49.06		29	71.12	74.46		39	96.52	99.86	
				20	48.26	51.60		30	73.66	77.00		40	99.06	102.40	

Ordering Information

CSHA1	XX	-	XX	XX	XX	X	XXX	A1AA
	Height Option (H)		No. of Pins per Row	Standard Plating		A	Pin Length (B)	
	08		02	02 : Gold Flash			001 : B=3.50	
			40	Selective Plating				
				01 : Tin				
				05 : Gold Flash / Tin				

Standard Packaging : Box

For special length requirement
Please contact our sales personnel