

Female Header

pitch 2.54mm (0.1") | Dual row | Dip

CSHA209 Series


Specifications

Current Rating : 3.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 600V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C


Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 PBT


All materials must meet Greenconn's requirements for environmental protection.

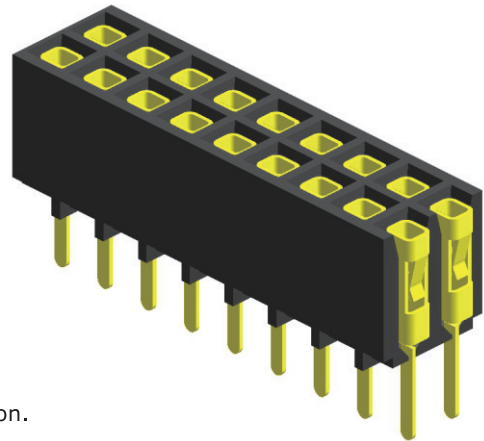

Mating with

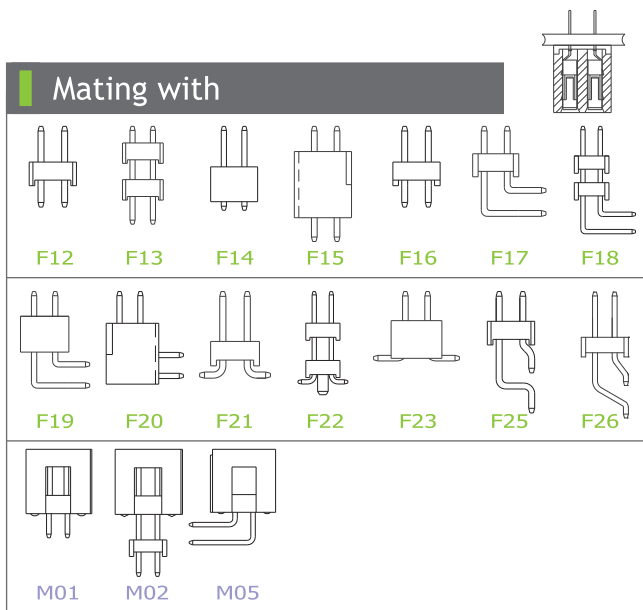

P.S. : Suggested mating pin length : 5.0 ~ 6.5 mm

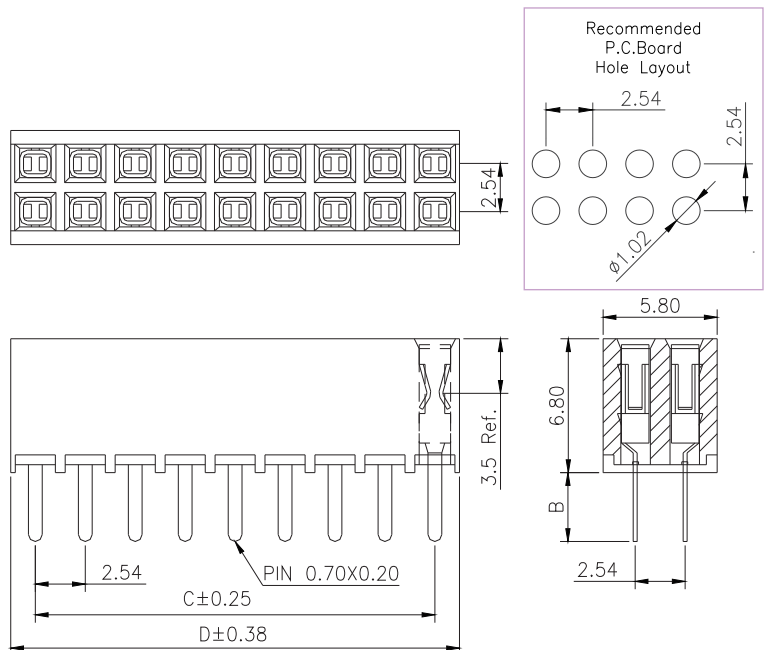

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
02	2.54	5.08	11	25.40	27.94	21	50.80	53.34
03	5.08	7.62	12	27.94	30.48	22	53.34	55.88
04	7.62	10.16	13	30.48	33.02	23	55.88	58.42
05	10.16	12.70	14	33.02	35.56	24	58.42	60.96
06	12.70	15.24	15	35.56	38.10	25	60.96	63.50
07	15.24	17.78	16	38.10	40.64	26	63.50	66.04
08	17.78	20.32	17	40.64	43.18	27	66.04	68.58
09	20.32	22.86	18	43.18	45.72	28	68.58	71.12
10	22.86	25.40	19	45.72	48.26	29	71.12	73.66
			20	48.26	50.80	30	73.66	76.20

Ordering Information

CSHA2	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	<input type="text" value="X"/>	<input type="text" value="XXX"/>	A1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	<input type="text" value="A"/>	Pin Length (B)	
	<input type="text" value="09"/>		<input type="text" value="02"/>	<input type="text" value="02"/> : Gold Flash	<input type="text" value="001"/>	: B=3.50	
			<input type="text" value="30"/>	Selective Plating	For special length requirement Please contact our sales personnel		
				<input type="text" value="01"/> : Tin			

Standard Packaging : Tube