










Contact Material : Phosphor Bronze  
Insulation Material : High Temperature Thermoplastic, 94V-0 PBT

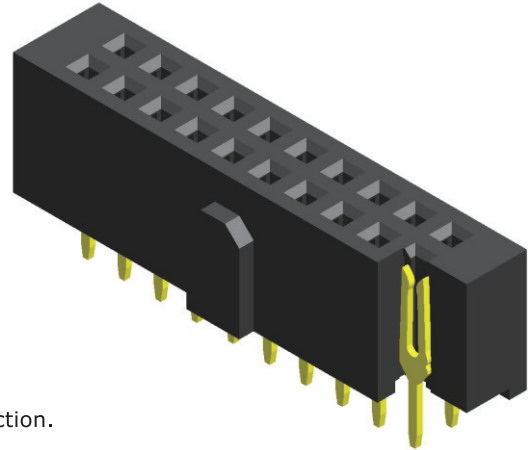

## Materials

Contact Material : Phosphor Bronze  
Insulation Material : High Temperature Thermoplastic, 94V-0 PBT

## Mating with

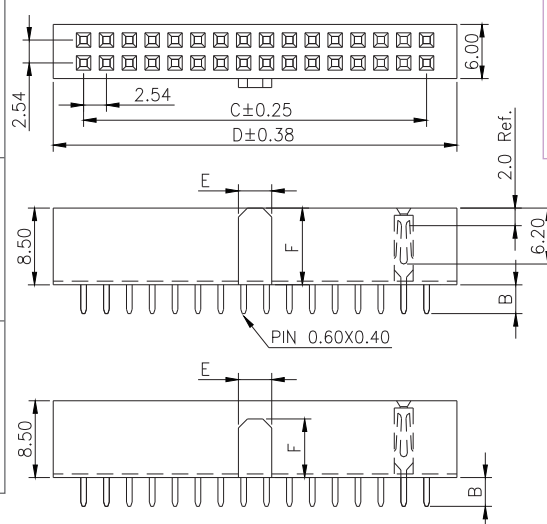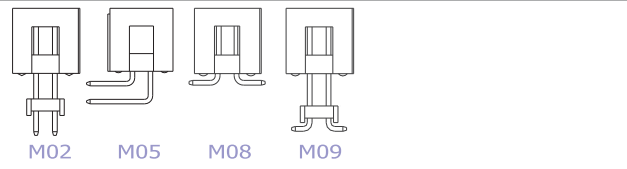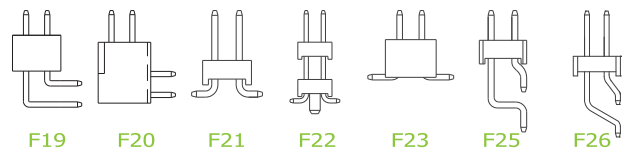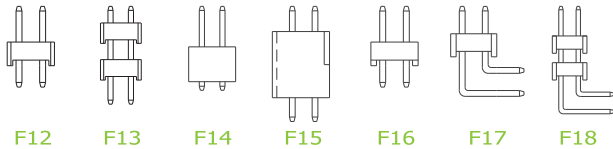

\* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

| No. of Pins/Row | Dimension Information |       |  | No. of Pins/Row | Dimension Information |       |  | No. of Pins/Row | Dimension Information |       |  | No. of Pins/Row | Dimension Information |       |  |
|-----------------|-----------------------|-------|--|-----------------|-----------------------|-------|--|-----------------|-----------------------|-------|--|-----------------|-----------------------|-------|--|
|                 | C                     | D     |  |                 | C                     | D     |  |                 | C                     | D     |  |                 | C                     | D     |  |
|                 |                       |       |  | 11              | 25.40                 | 28.44 |  | 21              | 50.80                 | 53.84 |  | 31              | 76.20                 | 79.24 |  |
|                 |                       |       |  | 12              | 27.94                 | 30.98 |  | 22              | 53.34                 | 56.38 |  | 32              | 78.74                 | 81.78 |  |
|                 |                       |       |  | 13              | 30.48                 | 33.52 |  | 23              | 55.88                 | 58.92 |  | 33              | 81.28                 | 84.32 |  |
| 04              | 7.62                  | 10.66 |  | 14              | 33.02                 | 36.06 |  | 24              | 58.42                 | 61.46 |  | 34              | 83.82                 | 86.86 |  |
| 05              | 10.16                 | 13.20 |  | 15              | 35.56                 | 38.60 |  | 25              | 60.96                 | 64.00 |  | 35              | 86.36                 | 89.40 |  |
| 06              | 12.70                 | 15.74 |  | 16              | 38.10                 | 41.14 |  | 26              | 63.50                 | 66.54 |  | 36              | 88.90                 | 91.94 |  |
| 07              | 15.24                 | 18.28 |  | 17              | 40.64                 | 43.68 |  | 27              | 66.04                 | 69.08 |  |                 |                       |       |  |
| 08              | 17.78                 | 20.82 |  | 18              | 43.18                 | 46.22 |  | 28              | 68.58                 | 71.62 |  |                 |                       |       |  |
| 09              | 20.32                 | 23.36 |  | 19              | 45.72                 | 48.76 |  | 29              | 71.12                 | 74.16 |  |                 |                       |       |  |
| 10              | 22.86                 | 25.90 |  | 20              | 48.26                 | 51.30 |  | 30              | 73.66                 | 76.70 |  |                 |                       |       |  |

## Ordering Information

CSHA2 

|    |
|----|
| XX |
|----|

Height Option (H)

17

- XX

No. of Pins per Row

04

2

XX

Standard Plating

**02 : Gold Flash**

## Selective Plating

01 : Tin

**05 : Gold Flash / Tin**

Standard Packaging : Tube

X    XXX

Pin Length (B / E / F)

A 001 : B=3.20 / E=3.70 / F=8.50

E 001 : B=3.20 / E=3.70 / F=6.50

For special length requirement  
Please contact our sales personnel