

Female Header

pitch 2.54mm (0.1") | Dual row | R/A

CSHB210 Series


Specifications

Current Rating : 3.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 600V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 PBT



All materials must meet Greenconn's requirements for environmental protection.

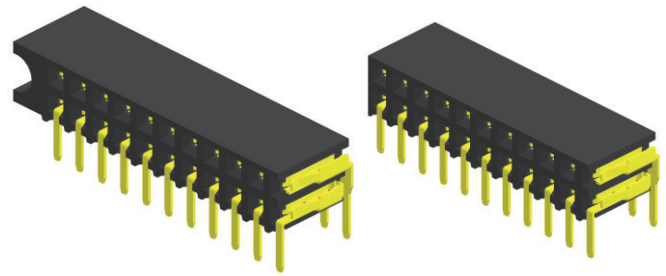



B Type

A Type


Mating with

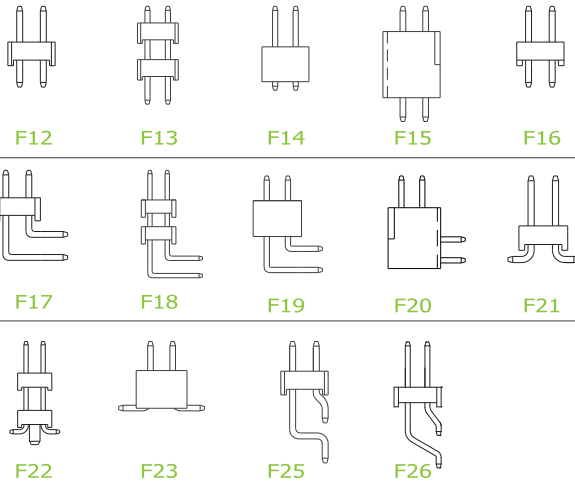

A TYPE

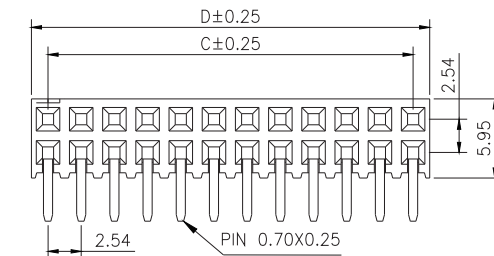

B TYPE

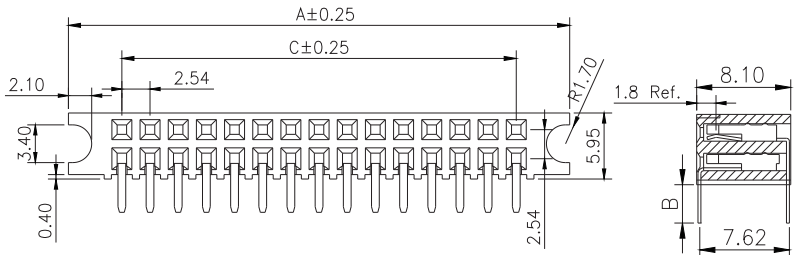

P.S. : Suggested mating pin length : 4.0 ~ 7.5 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C	D		A	C	D		A	C	D		A	C	D
03	14.72	5.08	7.62	11	35.04	25.40	27.94	21	60.44	50.80	53.34	31	85.84	76.20	78.74
04	17.26	7.62	10.16	12	37.58	27.94	30.48	22	62.98	53.34	55.88	32	88.38	78.74	81.28
05	19.80	10.16	12.70	13	40.12	30.48	33.02	23	65.52	55.88	58.42	33	90.92	81.28	83.82
06	22.34	12.70	15.24	14	42.66	33.02	35.56	24	68.06	58.42	60.96	34	93.46	83.82	86.36
07	24.88	15.24	17.78	15	45.20	35.56	38.10	25	70.60	60.96	63.50	35	96.00	86.36	88.90
08	27.42	17.78	20.32	16	47.74	38.10	40.64	26	73.14	63.50	66.04	36	98.54	88.90	91.44
09	29.96	20.32	22.86	17	50.28	40.64	43.18	27	75.68	66.04	68.58	37	101.08	91.44	93.98
10	32.50	22.86	25.40	18	52.82	43.18	45.72	28	78.22	68.58	71.12	38	103.62	93.98	96.52
				19	55.36	45.72	48.26	29	80.76	71.12	73.66	39	106.16	96.52	99.06
				20	57.90	48.26	50.80	30	83.30	73.66	76.20	40	108.70	99.06	101.60

Ordering Information

Standard Packaging : Tube

CSHB2	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	<input type="text" value="X"/>	<input type="text" value="XXX"/>	A1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	<input type="text" value="A"/>	Pin Length (B)	
	<input type="text" value="10"/>		<input type="text" value="03"/>	<input type="text" value="02"/> : Gold Flash		<input type="text" value="001"/> : B=3.00 (A Type)	
			<input type="text" value="40"/>	Selective Plating		<input type="text" value="015"/> : B=3.20 (B Type)	
				<input type="text" value="01"/> : Tin		For special length requirement	
				<input type="text" value="05"/> : Gold Flash / Tin		Please contact our sales personnel	