

Female Header

pitch 2.54mm (0.1") | Dual row | R/A | Polarization

CSHB217 Series


Specifications

Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT



All materials must meet Greenconn's requirements for environmental protection.

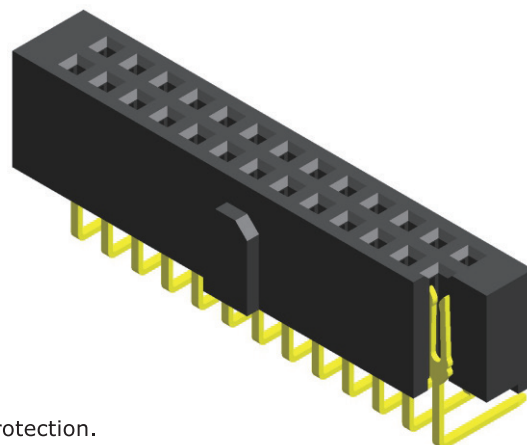

Mating with

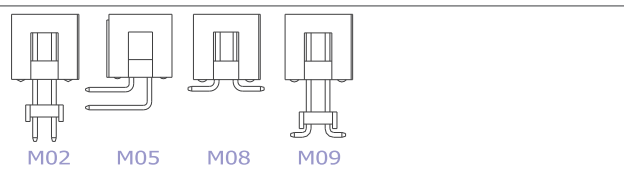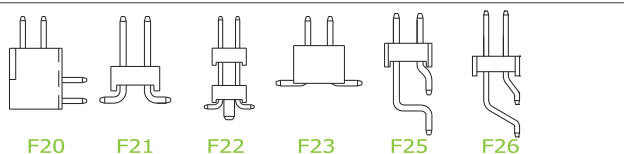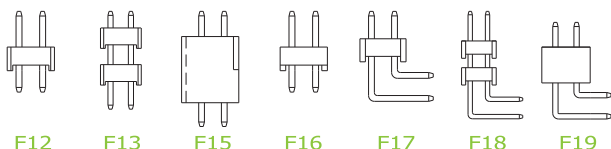

P.S. : Suggested mating pin length : 4.0 ~ 6.0 mm

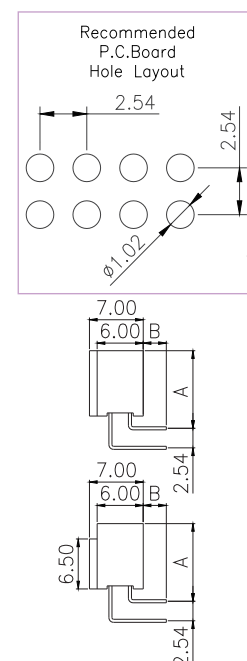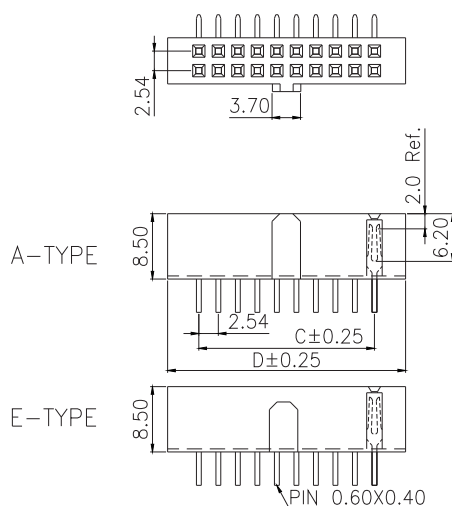

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
03	5.08	12.50	11	25.40	32.82	21	50.80	58.22	31	76.20	83.62
04	7.62	15.04	12	27.94	35.36	22	53.34	60.76	32	78.74	86.16
05	10.16	17.58	13	30.48	37.90	23	55.88	63.30	33	81.28	88.70
06	12.70	20.12	14	33.02	40.44	24	58.42	65.84	34	83.82	91.24
07	15.24	22.66	15	35.56	42.98	25	60.96	68.38	35	86.36	93.78
08	17.78	25.20	16	38.10	45.52	26	63.50	70.92	36	88.90	96.32
09	20.32	27.74	17	40.64	48.06	27	66.04	73.46			
10	22.86	30.28	18	43.18	50.60	28	68.58	76.00			
			19	45.72	53.14	29	71.12	78.54			
			20	48.26	55.68	30	73.66	81.08			

Ordering Information

CSHB2

XX

Height Option (H)

17

- XX

No. of Pins per Row

03

36

XX

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

X

XXX

A1AC

Pin Length (A / B)(Type)

A 001 : A=10.10 / B=3.00 (A Type)

E 001 : A=10.10 / B=3.00 (E Type)

For special length requirement
Please contact our sales personnel