

# Female Header

pitch 2.54mm (0.1") | Single row | S.M.T. | Board spacer | Locating peg

CSHC125 Series


## Specifications

Current Rating : 3.0 Ampere  
 Insulation Resistance : 1000 MΩ Min  
 Dielectric Withstanding : 600V AC  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature : -40°C to +105°C


## Materials

Contact Material : Phosphor Bronze  
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

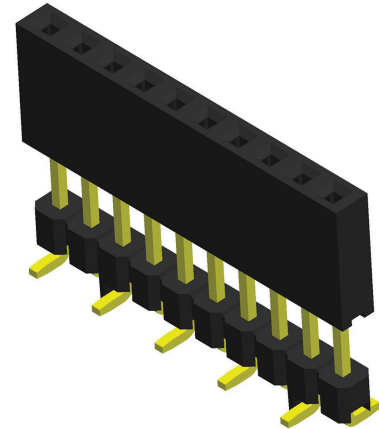

## Mating with

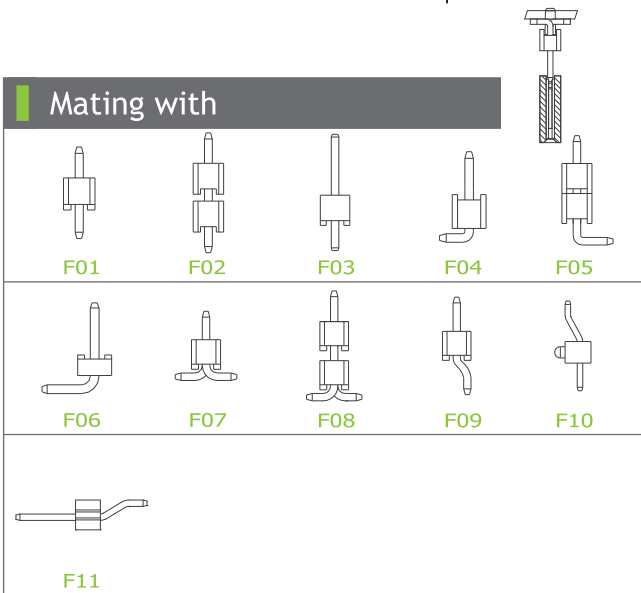

P.S. : Suggested mating pin length : 4.5 ~ 6.0 mm

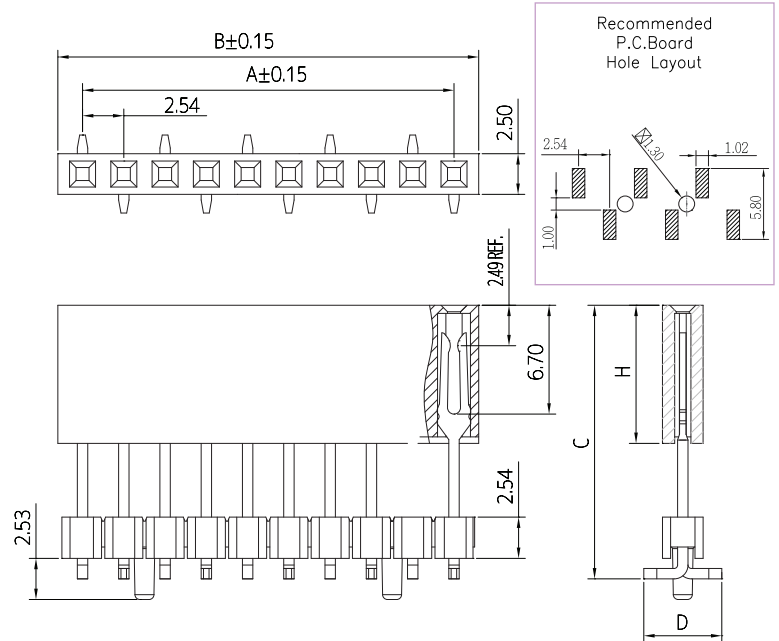

\* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		
	A	B	
10	22.86	25.90	

## Ordering Information

CSHC1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (C / D)	
	<input type="checkbox"/> 10 : H=8.50		<input type="checkbox"/> 10	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : C=18.64 / B=4.80	
				Selective Plating		For special length requirement Please contact our sales personnel
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Standard Packaging : Tube