

Board to Board

pitch 1.00mm (0.039") | Male | S.M.T. | Locating peg

GBCC210 Series


Specifications

Current Rating :	0.5 Ampere
Insulation Resistance :	500 MΩ Min
Dielectric Withstanding :	200V AC
Contact Resistance :	30 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP


All materials must meet Greenconn's requirements for environmental protection.

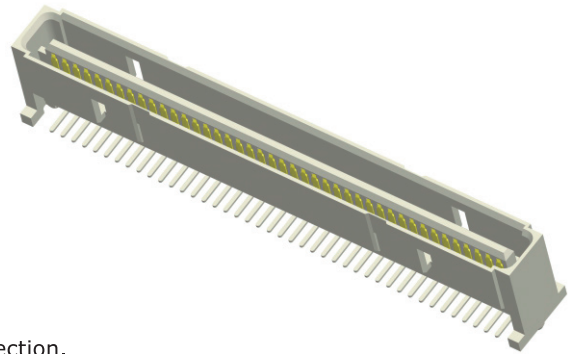





Mating with



B05



Recommended P.C.Board Layout

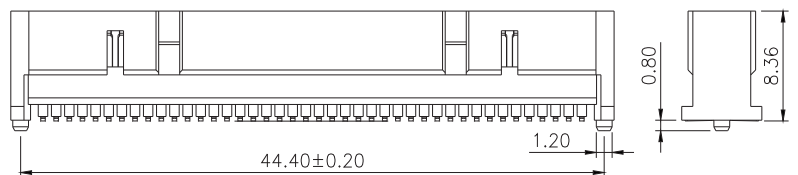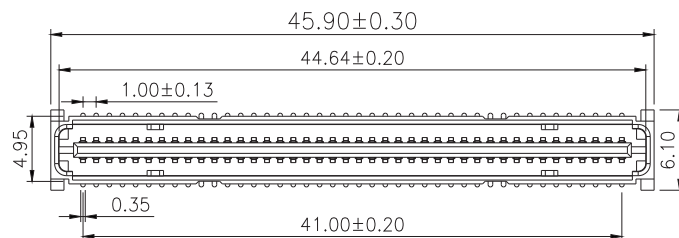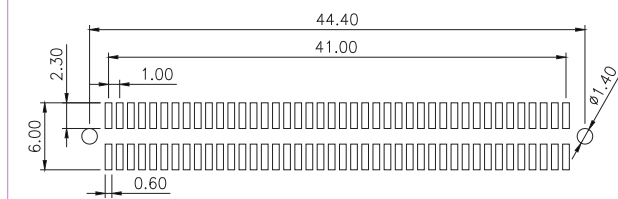

Ordering Information

Standard Packaging : Cap+Tape Reel

GBCC2	XX	-	XX	XX	B001C2AF
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	
	10		42	38 : Gold 10u" / Matte Tin 100u"	
				Selective Plating	
				01 : Tin	
				02 : Gold Flash	