

Pin Header

pitch 1.00mm (0.039") | Dual row | Dip

GPCA210 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP





All materials must meet Greenconn's requirements for environmental protection.

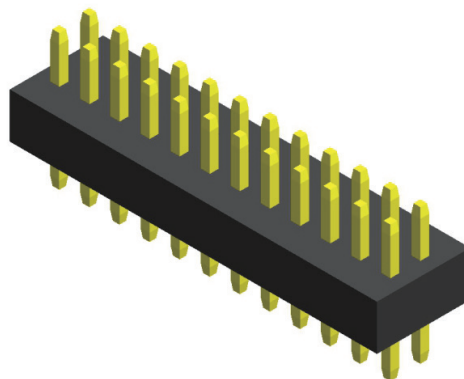

Mating with



B20

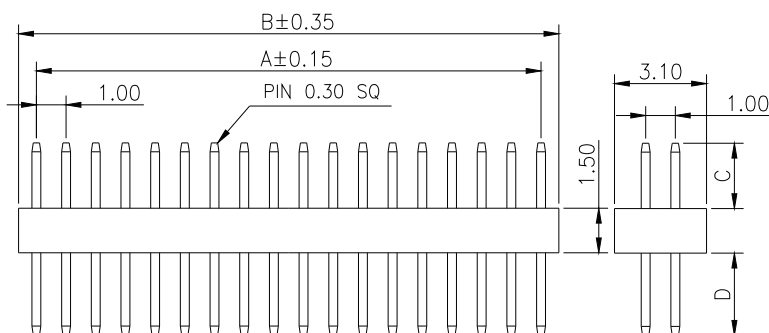

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	1.00	2.20	11	10.00	11.20	21	20.00	21.20	31	30.00	31.20
03	2.00	3.20	12	11.00	12.20	22	21.00	22.20	32	31.00	32.20
04	3.00	4.20	13	12.00	13.20	23	22.00	23.20	33	32.00	33.20
05	4.00	5.20	14	13.00	14.20	24	23.00	24.20	34	33.00	34.20
06	5.00	6.20	15	14.00	15.20	25	24.00	25.20	35	34.00	35.20
07	6.00	7.20	16	15.00	16.20	26	25.00	26.20	36	35.00	36.20
08	7.00	8.20	17	16.00	17.20	27	26.00	27.20	37	36.00	37.20
09	8.00	9.20	18	17.00	18.20	28	27.00	28.20	38	37.00	38.20
10	9.00	10.20	19	18.00	19.20	29	28.00	29.20	39	38.00	39.20
			20	19.00	20.20	30	29.00	30.20	40	39.00	40.20

Ordering Information

GPCA2

XX

Height Option (H) Standard

10

- XX

No. of Pins per Row

02

1

40

XX

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

Standard Packaging : Box

X

A

XXX

Pin Length (C/D)

010 : C=4.00 / D=2.00

700 : C=1.90 / D=3.00

For special length requirement
Please contact our sales personnel

C1AA