

Pin Header

pitch 1.00mm (0.039") | Dual row | S.M.T.

GPCD201 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP




All materials must meet Greenconn's requirements for environmental protection.

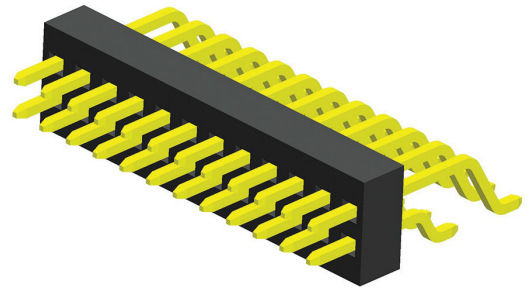



Mating with



B20

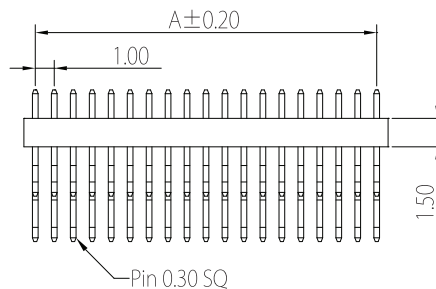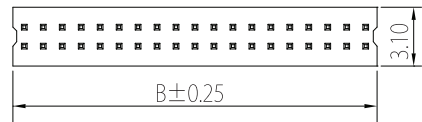

Recommended P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B	
02	1.00	2.20		11	10.00	11.20	
03	2.00	3.20		12	11.00	12.20	
04	3.00	4.20		13	12.00	13.20	
05	4.00	5.20		14	13.00	14.20	
06	5.00	6.20		15	14.00	15.20	
07	6.00	7.20					
08	7.00	8.20					
09	8.00	9.20					
10	9.00	10.20					

Ordering Information

GPCD2 XX

Layer Option (H)

01 : H=1.50

- XX

No. of Pins per Row

02

}

15

XX

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

Standard Packaging : Tube

X

XXX

C1AC

A

Pin Length (C/D/E)

002 : C=1.50 / D=2.60 / E=5.00

004 : C=2.50 / D=2.60 / E=5.00

For special length requirement
Please contact our sales personnel