

Box header

1.27mm pitch (0.05") | R/A | Polarization

GPEB252 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP





All materials must meet Greenconn's requirements for environmental protection.

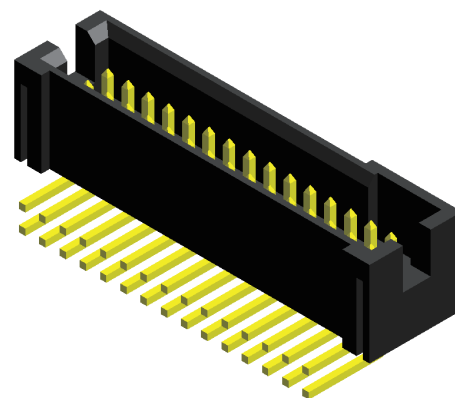

Mating with

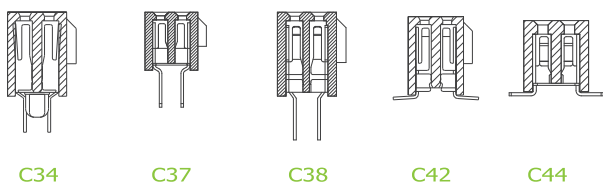

C49

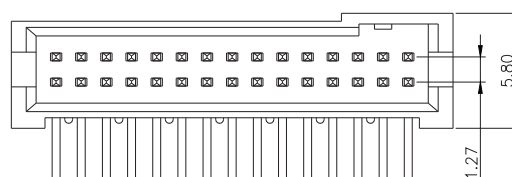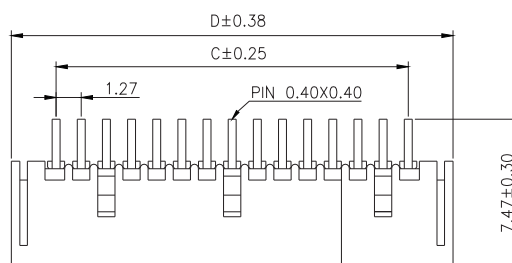

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D	
								22	26.67	31.19	
05	5.08	9.60		15	17.78	22.30		25	30.48	35.00	
06	6.35	10.87									
08	8.89	13.41									
10	11.43	15.95		20	24.13	28.65		30	36.83	41.35	

Ordering Information

GPEB2

XX

Height Option (H)

52

- XX

No. of Pins per Row

05 06 08
10 15
20 22 25
30

XX

Standard Plating

01 : Tin
02 : Gold Flash

Selective Plating

05 : Gold Flash / Tin

Standard Packaging : Tube

X

A

XXX

Pin Length (H)

001 : H=1.75

C1AC

For special length requirement
Please contact our sales personnel