

Box header

1.27mm pitch (0.05") | S.M.T. | R/A | Locating peg | Polarization

GPED252 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C







Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

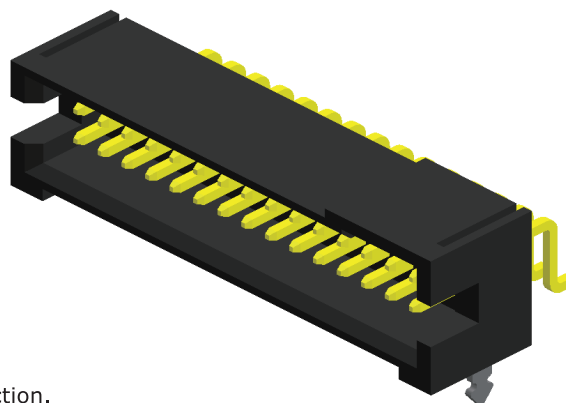

Mating with

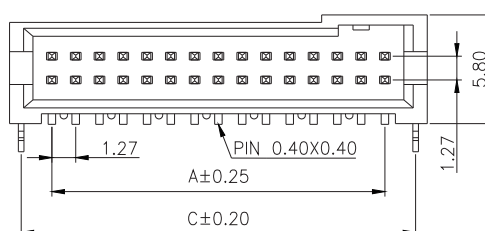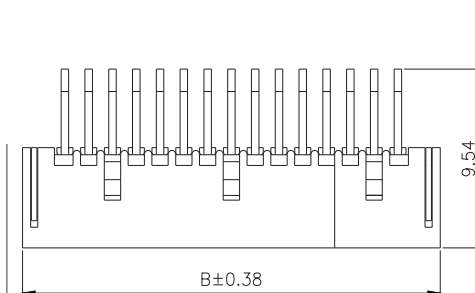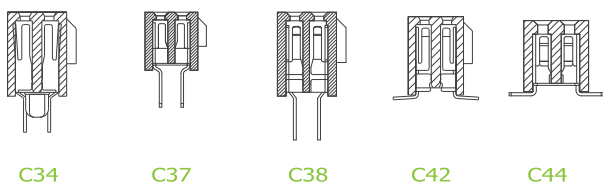

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C
								22	26.67	31.19	29.94
								24	29.21	33.68	32.48
05	5.08	9.60	8.35	15	17.78	22.30	21.05				
08	8.89	13.41	12.16								
10	11.43	15.95	14.70	20	24.13	28.65	27.40	30	36.83	41.35	40.10

Ordering Information

GPED2

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Tin
 : Gold Flash

Selective Plating

: Gold Flash / Tin

Standard Packaging : Tube

Pin Length (W)

: W=7.00

C1AC

For special length requirement
Please contact our sales personnel