

Pin Header

pitch 2.00mm (0.079") | Single row | Dip

GPFA113 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT

All materials must meet Greenconn's requirements for environmental protection.

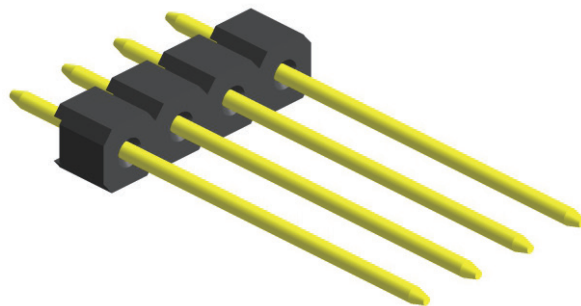

Mating with

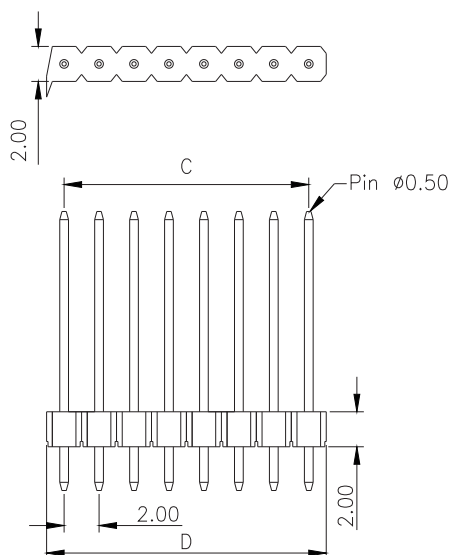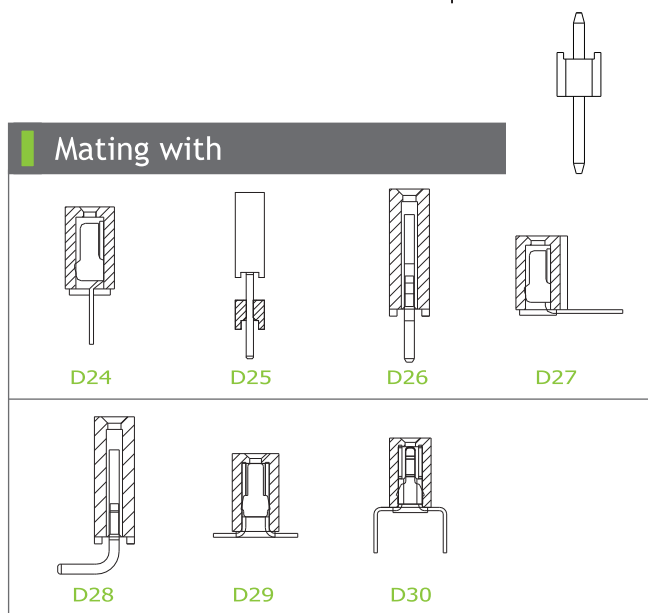

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
				11	20.00	22.00		21	40.00	42.00		31	60.00	62.00	
				12	22.00	24.00		22	42.00	44.00		32	62.00	64.00	
				13	24.00	26.00		23	44.00	46.00					
04	6.00	8.00		14	26.00	28.00		24	46.00	48.00					
05	8.00	10.00		15	28.00	30.00		25	48.00	50.00					
06	10.00	12.00		16	30.00	32.00		26	50.00	52.00					
07	12.00	14.00		17	32.00	34.00		27	52.00	54.00					
08	14.00	16.00		18	34.00	36.00		28	54.00	56.00					
09	16.00	18.00		19	36.00	38.00		29	56.00	58.00					
10	18.00	20.00		20	38.00	40.00		30	58.00	60.00					

Ordering Information

GPFA1 **XX**

Height Option (H)

13

- **XX**

No. of Pins per Row

04

1

32

XX

Standard Plating

01 : Tin

02 : Gold Flash

Selective Plating

05 : Gold Flash / Tin

Standard Packaging : Box

A001A1BA