

Box header

2.00mm pitch (0.079") | Dip | Polarization

GPFA213 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

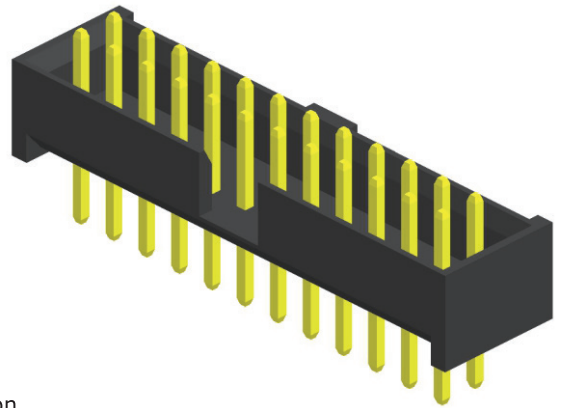

Mating with

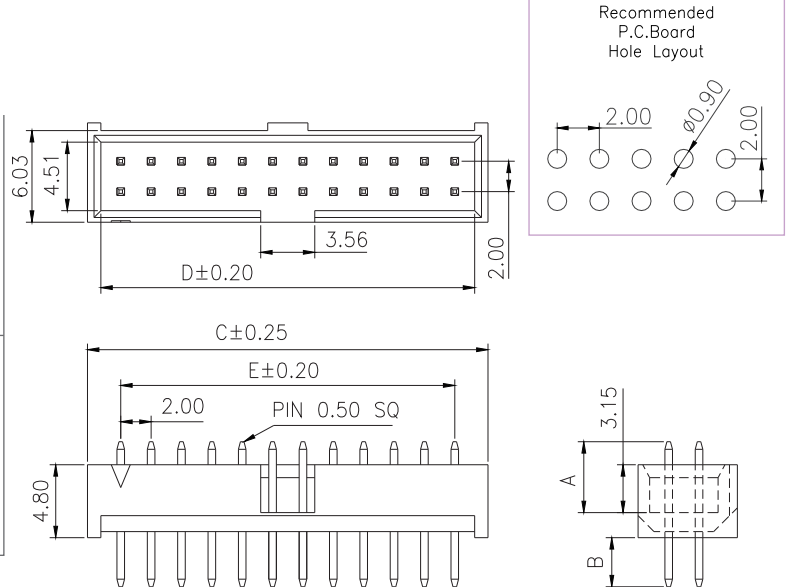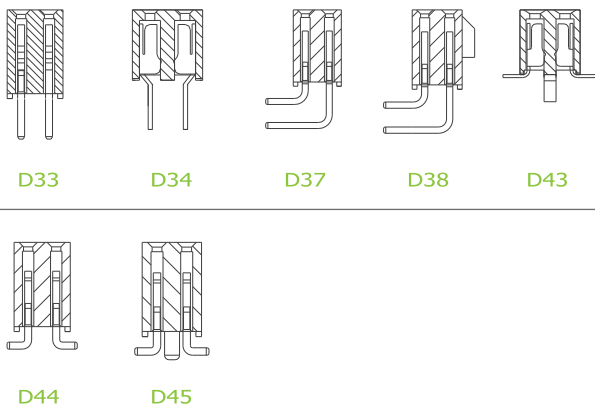

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D	E		C	D	E		C	D	E
				11	24.38	22.62	20.00	21	44.38	42.62	40.00
				12	26.38	24.62	22.00	22	46.38	44.62	42.00
				13	28.38	26.62	24.00	23	48.38	46.62	44.00
04	10.38	8.62	6.00	14	30.38	28.62	26.00	24	50.38	48.62	46.00
05	12.38	10.62	8.00	15	32.38	30.62	28.00	25	52.38	50.62	48.00
06	14.38	12.62	10.00	16	34.38	32.62	30.00				
07	16.38	14.62	12.00	17	36.38	34.62	32.00				
08	18.38	16.62	14.00	18	38.38	36.62	34.00				
09	20.38	18.62	16.00	19	40.38	38.62	36.00				
10	22.38	20.62	18.00	20	42.38	40.62	38.00				

Ordering Information

GPFA2	XX	-	XX	XX	XX	X	XXX	C1BC
	Height Option (H)		No. of Pins per Row	Standard Plating		A	Pin Length (A/B)	
	13		04	02 : Gold Flash		001	: A=4.67 / B=3.23	
			25	Selective Plating			For special length requirement Please contact our sales personnel	
				01 : Tin				
				05 : Gold Flash / Tin				