

Box header

pitch 2.00mm (0.079") | Dip | Board spacer | Polarization

GPFA221 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

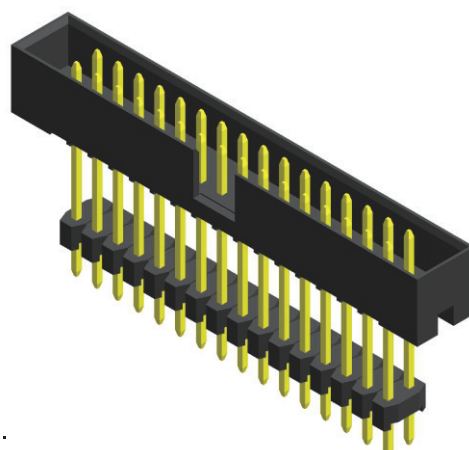


Mating with




D33




D34




D37






D38



D44



D45

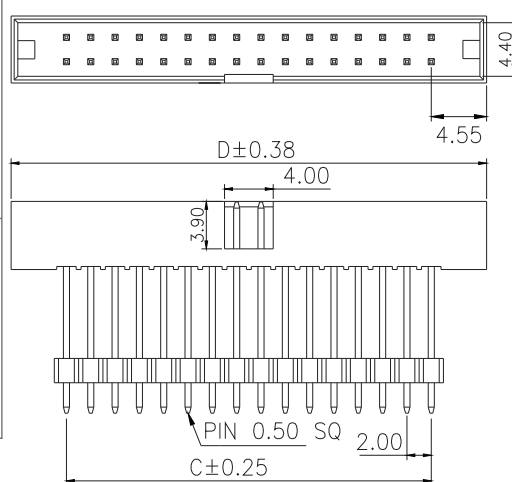

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D	
				11	20.00	29.10		21	40.00	49.10	
				12	22.00	31.10		22	42.00	51.10	
				13	24.00	33.10		23	44.00	53.10	
04	6.00	15.10		14	26.00	35.10		24	46.00	55.10	
05	8.00	17.10		15	28.00	37.10		25	48.00	57.10	
06	10.00	19.10		16	30.00	39.10					
07	12.00	21.10		17	32.00	41.10					
08	14.00	23.10		18	34.00	43.10					
09	16.00	25.10		19	36.00	45.10					
10	18.00	27.10		20	38.00	47.10					

Ordering Information

GPFA2

XX

Height Option (H)

21

- XX

No. of Pins per Row

04

1

25

XX

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

X

A

XXX

Pin Length (A/B)

003 : A=15.0 / B=2.80

024 : A=17.5 / B=5.50

For special length requirement
Please contact our sales personnel

R1BC