

Ejector Box header

pitch 2.00mm (0.079") | Dip | Polarization | with Lock

GPFA233 Series






Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

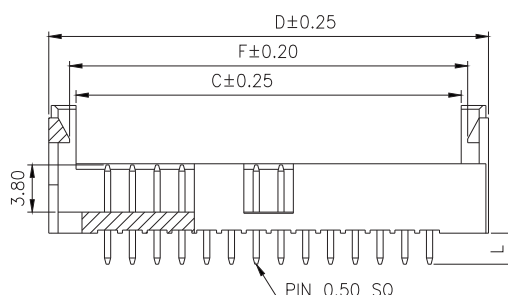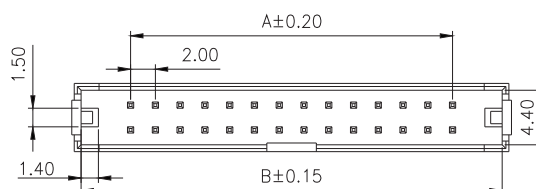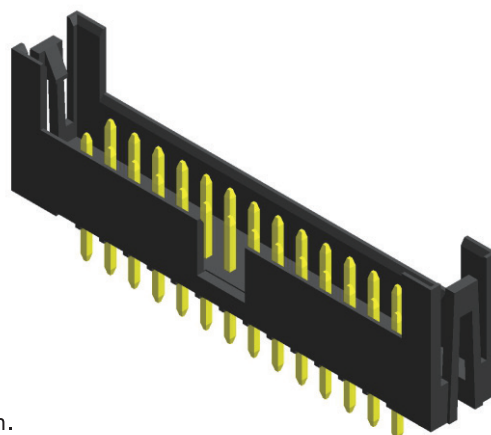

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information					
	A	B	C	D	F	
05	8.00	16.00	12.20	17.50	14.20	
06	10.00	18.00	14.20	19.50	16.20	
07	12.00	20.00	16.20	21.50	18.20	
08	14.00	22.00	18.20	23.50	20.20	
09	16.00	24.00	20.20	25.50	22.20	
10	18.00	26.00	22.20	27.50	24.20	
11	20.00	28.00	24.20	29.50	26.20	
12	22.00	30.00	26.20	31.50	28.20	
13	24.00	32.00	28.20	33.50	30.20	

No. of Pins/Row	Dimension Information					
	A	B	C	D	F	
14	26.00	34.00	30.20	35.50	32.20	
15	28.00	36.00	32.20	37.50	34.20	
16	30.00	38.00	34.20	39.50	36.20	
17	32.00	40.00	36.20	41.50	38.20	
18	34.00	42.00	38.20	43.50	40.20	
19	36.00	44.00	40.20	45.50	42.20	
20	38.00	46.00	42.20	47.50	44.20	
21	40.00	48.00	44.20	49.50	46.20	
22	42.00	50.00	46.20	51.50	48.20	
23	44.00	52.00	48.20	53.50	50.20	
24	46.00	54.00	50.20	55.50	52.20	
25	48.00	56.00	52.20	57.50	54.20	

Ordering Information

GPFA2

XX

Height Option (H)

33

- XX

No. of Pins per Row

05

25

XX

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

X

XXX

R1BC

A Pin Length (L)

001 : L=2.50

For special length requirement
Please contact our sales personnel