

Box header

pitch 2.00mm (0.079") | S.M.T. | Locating peg | Polarization

GPFC214 Series


Specifications

Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C



Materials

Contact Material : Brass
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

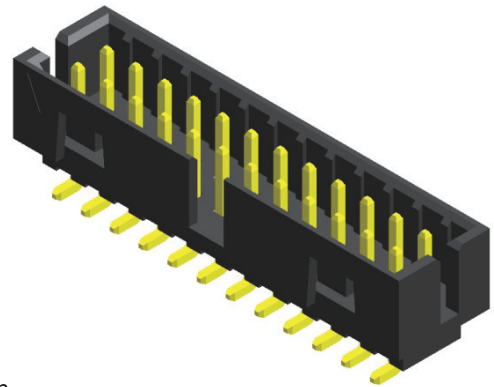

Mating with

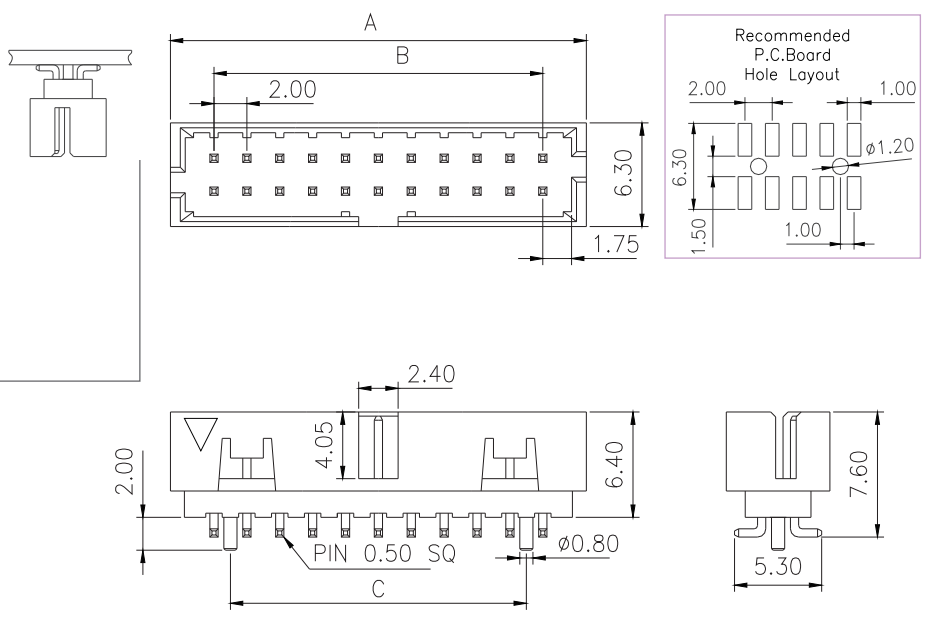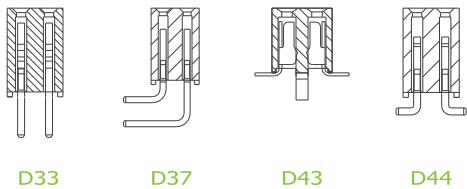

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C
				11	24.65	20.00	18.00	21	44.65	40.00	38.00
				12	26.65	22.00	20.00	22	46.65	42.00	40.00
				13	28.65	24.00	22.00	23	48.65	44.00	42.00
04	10.65	6.00	4.00	14	30.65	26.00	24.00	24	50.65	46.00	44.00
05	12.65	8.00	6.00	15	32.65	28.00	26.00	25	52.65	48.00	46.00
06	14.65	10.00	8.00	16	34.65	30.00	28.00				
07	16.65	12.00	10.00	17	36.65	32.00	30.00				
08	18.65	14.00	12.00	18	38.65	34.00	32.00				
09	20.65	16.00	14.00	19	40.65	36.00	34.00				
10	22.65	18.00	16.00	20	42.65	38.00	36.00				

Ordering Information

Standard Packaging : Tube

GPFC2 - B001R1BC
 Height Option (H) No. of Pins per Row Standard Plating : Gold Flash
 : Tin
 : Gold Flash / Tin