

Pin Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

GPFC217 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

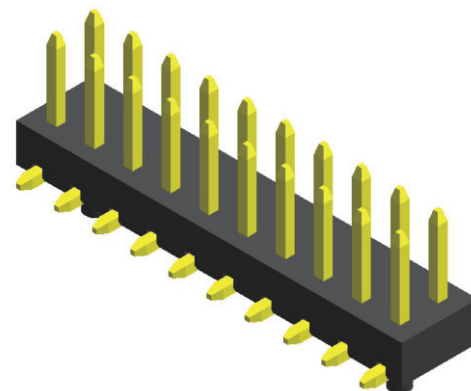


Mating with

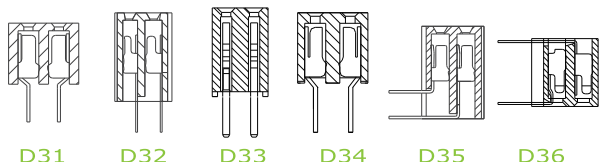





D31 D32 D33 D34 D35 D36



D37 D39 D40 D41 D42 D43



D44 D45 D46 D47 D48 D49

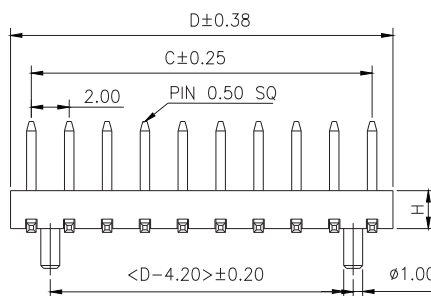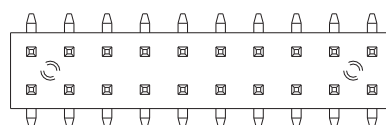

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
03	4.00	6.20		11	20.00	22.20		21	40.00	42.20		31	60.00	62.20	
04	6.00	8.20		12	22.00	24.20		22	42.00	44.20		32	62.00	64.20	
05	8.00	10.20		13	24.00	26.20		23	44.00	46.20		33	64.00	66.20	
06	10.00	12.20		14	26.00	28.20		24	46.00	48.20		34	66.00	68.20	
07	12.00	14.20		15	28.00	30.20		25	48.00	50.20		35	68.00	70.20	
08	14.00	16.20		16	30.00	32.20		26	50.00	52.20		36	70.00	72.20	
09	16.00	18.20		17	32.00	34.20		27	52.00	54.20		37	72.00	74.20	
10	18.00	20.20		18	34.00	36.20		28	54.00	56.20		38	74.00	76.20	
				19	36.00	38.20		29	56.00	58.20		39	76.00	78.20	
				20	38.00	40.20		30	58.00	60.20		40	78.00	80.20	

Ordering Information

GPFC2

Height Option (H)

: H=2.00

-

No. of Pins per Row

↓

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

R1BC

Pin Length (A/B/W)

: A=3.50 / B=2.20 / W=6.50

For special length requirement
Please contact our sales personnel