

Pin Header

pitch 2.54mm (0.1") | Dual row | S.M.T. | Locating peg

GPHC213 Series


Specifications

Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon






All materials must meet Greenconn's requirements for environmental protection.

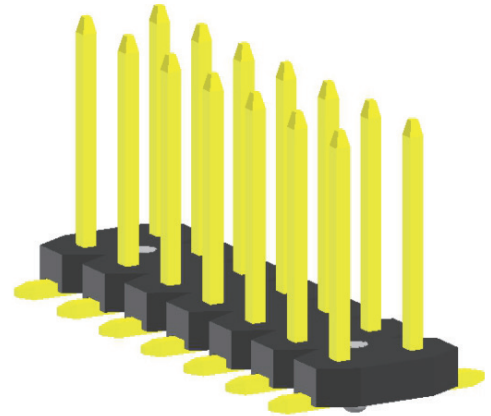

Mating with



F47

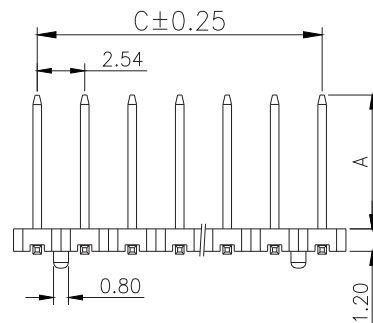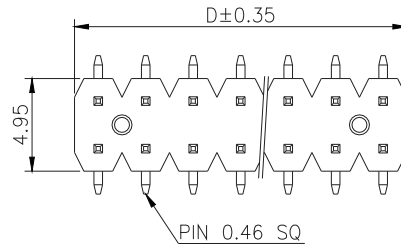

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		
	C	D	
02	2.54	5.08	
03	5.08	7.62	
04	7.62	10.16	
05	10.16	12.70	
06	12.70	15.24	
07	15.24	17.78	
08	17.78	20.32	
09	20.32	22.86	

Ordering Information

GPHC2 XX

Height Option (H)

13

- XX

No. of Pins per Row

02

}

09

XX

Standard Plating

01 : Tin

02 : Gold Flash

Selective Plating

05 : Gold Flash / Tin

Standard Packaging : Tube

X

B

XXX

Pin Length (A / W)

001 : A=5.94 / W=7.40

R1AC

For special length requirement
Please contact our sales personnel