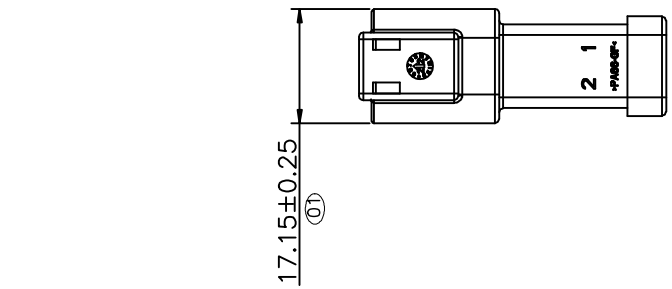

Specifications

Current Rating 14 AWG: 13.0Amp AC/DC
16 AWG: 13.0Amp AC/DC
18 AWG: 10.0Amp AC/DC
20 AWG: 7.5Amp AC/DC

Voltage Rating: 250V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1500VAC
Contact Resistance:20mΩMax.
Operating Temperature:−55°C to +125°C

Materials

Insulator Material:High Temperature Thermoplastic, UL 94V−0 PA66 or the equivalent material

☆All materials must meet Greenconn hazardous substances control standards.

"★": Significant Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

"☆": Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

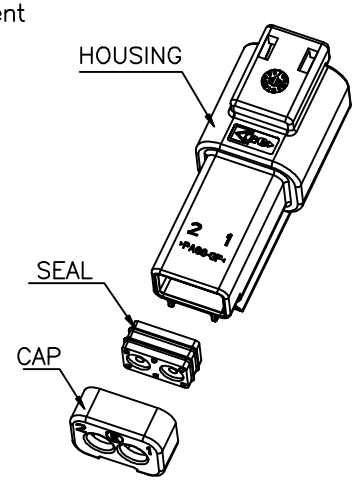

Greenconn Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. AGZ021-HA	TITLE. 2 WAY RECEPTACLE,STANDARD SEAL EXTRA THIN SEAL,SHORT CAP SERIES
		X.°±3.0°	X.±0.30				
		.X°±2.0°	.X±0.25	CHECKED:	DATE:		
		.XX°±1.0°	.XX±0.20			PART NO. AGZ021-02APA	
REV. A / UNIT. mm / SCALE. 1:1	PAGE. 1/1	.XXX°±0.5°	.XXX±0.15	APPROVED:	DATE:		