

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

Specifications

Current Rating 14 AWG: 13.0Amp AC/DC
 16 AWG: 13.0Amp AC/DC
 18 AWG: 10.0Amp AC/DC
 20 AWG: 7.5Amp AC/DC

Voltage Rating: 250V AC/DC.
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:1500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-55°C to +125°C

Materials

Insulator Material:High Temperature Thermoplastic, UL 94V-0 PA66 or the equivalent material






★All materials must meet Greenconn hazardous substances control standards.



★★: Significant Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

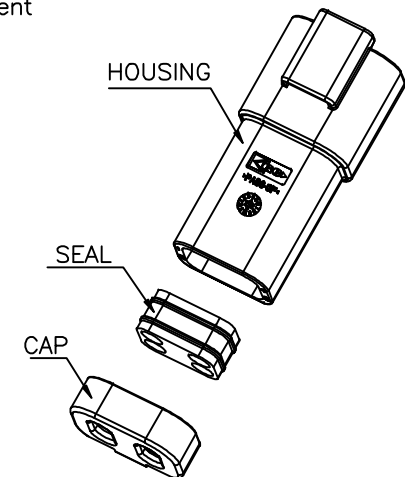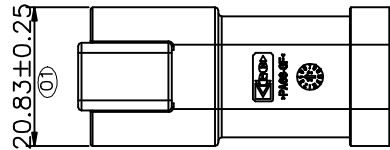

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ. 	GENERAL TOLERANCE X.'±3.0' X.±0.30 .X'±2.0' .X±0.25 .XX'±1.0' .XX±0.20 .XXX'±0.5' .XXX±0.15	DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. AGZ021-HA PART NO. AGZ021-04APA	TITLE. 4 WAY RECEPTACLE,STANDARD SEAL EXTRA THIN SEAL,SHORT CAP SERIES
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1					

1 2 3 4 5 6 7 8 9