





INKJET CODE Description : XX X XX XX

XX-YEAR: 20 = 2020  
X-MONTH: A = JAN, B = FEB,.....  
XX-DAY: 14 = 14th DAY  
XX-HOUR: 14 = 14 PM


Specifications  
Current Rating:13.0Amp AC/DC  
Voltage Rating: 48V AC/DC.  
Insulation Resistance:1000MΩMin.  
Dielectric Withstanding Voltage:1500VAC  
Contact Resistance:20mΩMax.  
Operating Temperature:-55°C to +125°C  
Materials  
Contact Material:Brass  
Insulator Material:High Temperature  
Thermoplastic, UL 94V-0 PA66  
or the equivalent material  
All materials must meet Greenconn  
hazardous substances control standards.  
★: Significant Characteristics.



Spray code




VIEW A

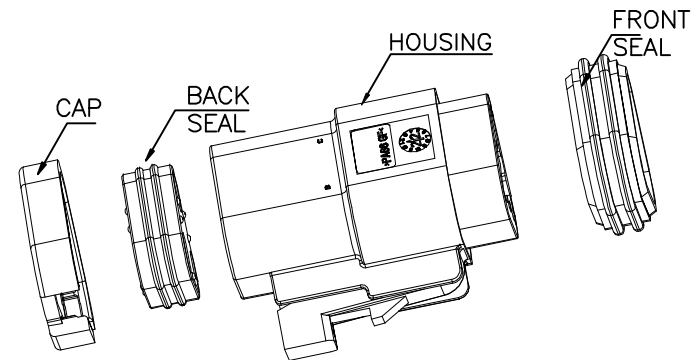

Website:www.greenconn.com  
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 3:2

3RD.ANG  
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±3.0°	X.±0.30
.X'±2.0°	.X±0.25
.XX'±1.0°	.XX±0.20
.XXX'±0.5°	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

AGZ060-HA-N

PART NO.

AGZ060-03APA-N

TITLE.

3 WAY PLUG  
STANDARD SEAL  
SHORT CAP GT SERIES