

INKJET CODE Description : XX X XX XX

XX-YEAR: 20 = 2020

X-MONTH: A = JAN, B = FEB,.....

XX-DAY: 14 = 14th DAY

XX-HOUR: 14 = 14 PM

Specifications

Current Rating:13.0Amp AC/DC

Voltage Rating: 48V AC/DC.

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1500VAC

Contact Resistance:20mΩMax.

Operating Temperature:-55°C to +125°C

Materials

Contact Material:Brass

Insulator Material:High Temperature




Thermoplastic, UL 94V-0 PA66

or the equivalent material


All materials must meet Greenconn

hazardous substances control standards.


★: Significant Characteristics.



Spray
code




VIEW A

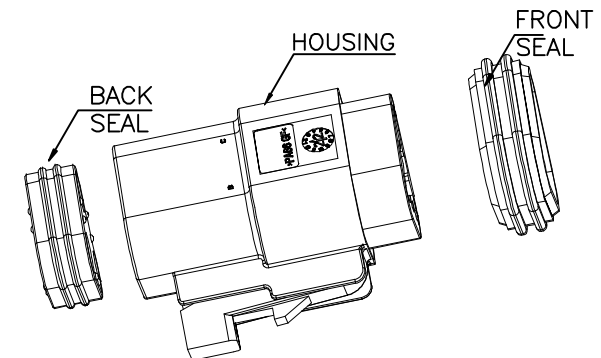

Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 3:2

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

AGZ070-HA-N

PART NO.

AGZ070-03APA-N

TITLE.

3 WAY PLUG
STANDARD SEAL
SHORT CAP GT SERIES