

INKJET CODE Description: XX X XX XX

XX-YEAR: 20 = 2020  
X-MONTH: A = JAN, B = FEB,.....  
XX-DAY: 14 = 14th DAY  
XX-HOUR: 14 = 14 PM

### Specifications

Current Rating 14 AWG: 13.0Amp AC/DC  
16 AWG: 13.0Amp AC/DC  
18 AWG: 10.0Amp AC/DC  
20 AWG: 7.5Amp AC/DC






Voltage Rating: 250V AC/DC.  
Insulation Resistance:1000MΩMin.  
Dielectric Withstanding Voltage:1500VAC  
Contact Resistance:20mΩMax.  
Operating Temperature:-55°C to +125°C  
Materials

Insulator Material:High Temperature  
Thermoplastic, UL 94V-0 PA66  
or the equivalent material

★ All materials must meet Greenconn  
hazardous substances control standards.

★: Critical Characteristics.  
indicates product characteristics,  
functionalities, and manufacturing processes  
regarding to customer's specifications


★: Safety Features  
indicates product characteristics,  
functionalities, and manufacturing processes  
complying to legal regulations stated by  
local government

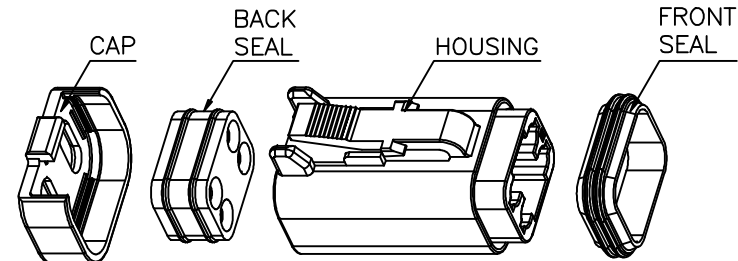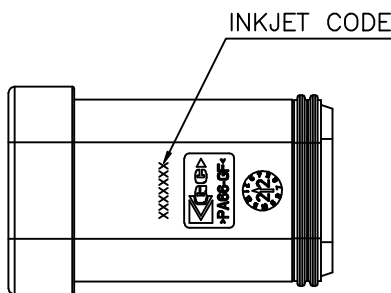

Website:www.greenconn.com  
E-mail:sales@greenconn.com

| REV. | UNIT. | SCALE. |
|------|-------|--------|
| A    | mm    | 3:2    |

3RD.ANG  
PROJ.



PAGE. 1/1

### GENERAL TOLERANCE

|            |           |
|------------|-----------|
| X.±3.0'    | X.±0.30   |
| .X'±2.0'   | .X±0.25   |
| .XX'±1.0'  | .XX±0.20  |
| .XXX'±0.5' | .XXX±0.15 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

AGZ131-HA

PART NO.

AGZ131-04APA

TITLE.

4 WAY PLUG  
STANDARD SEAL  
GT SERIES