


Mated Figure

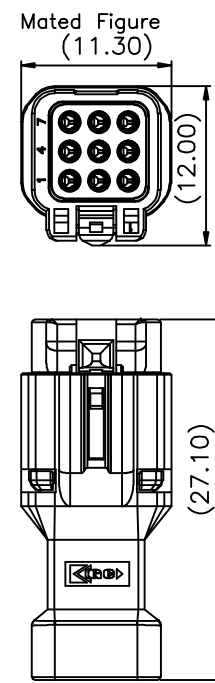

Specifications
 Current Rating 20 AWG: 3.5Amp/PIN
 22 AWG: 3.0Amp/PIN
 24 AWG: 2.0Amp/PIN
 26 AWG: 1.0Amp/PIN
 Voltage Rating: 250V AC/DC.
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:650VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:−40°C to +105°C
 Materials
 Insulator Material:Temperature
 Thermoplastic, UL 94V−0 PBT
 or the equivalent material
 ★ All materials must meet Greenconn
 hazardous substances control standards.
 ■★: Critical Characteristics.
 indicates product characteristics,
 functionalities, and manufacturing processes
 regarding to customer's specifications
 ■★: Safety Features
 indicates product characteristics,
 functionalities, and manufacturing processes
 complying to legal regulations stated by
 local government

Greenconn
 Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. D	UNIT. mm	SCALE. 3:2
--------	----------	------------

3RD.ANG PROJ.	GENERAL TOLERANCE	
	X.'±3.0'	X.±0.30
	.X'±2.0'	.X±0.25
	.XX'±1.0'	.XX±0.20
	.XXX'±0.5'	.XXX±0.15
PAGE. 1/1		

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. AGZ173-HA-N	TITLE. 2.2Pitch 9Pin SEAL Series Female Ass'y
PART NO. AGZ173-03AAT-N	