

Specifications

Current Rating 20 AWG: 3.5Amp/PIN \triangle

22 AWG: 3.0Amp/PIN

24 AWG: 2.0Amp/PIN

26 AWG: 1.0Amp/PIN

Voltage Rating: 250V AC/DC.

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 650VAC

Contact Resistance: 30mΩMax.

Operating Temperature: -40°C to +105°C

Materials

Insulator Material: Temperature

Thermoplastic, UL 94V-0 PBT

or the equivalent material







★ All materials must meet Greenconn hazardous substances control standards.

★: Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features


indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

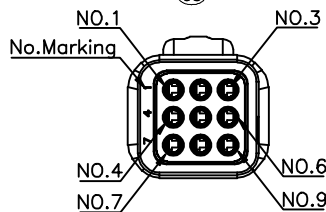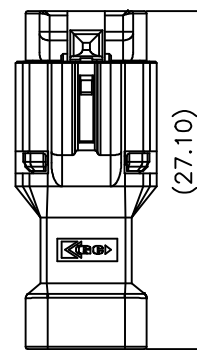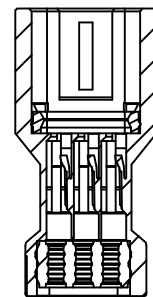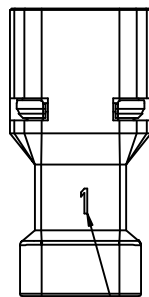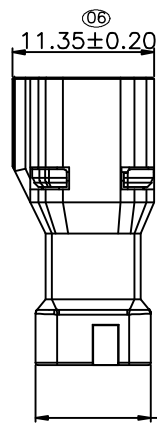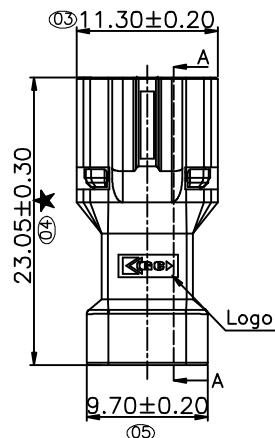

Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. D UNIT. mm SCALE. 3:2

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±3.0' X.±0.30

.X'±2.0' .X±0.25

.XX'±1.0' .XX±0.20

.XXX'±0.5' .XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

AGZ183-HA-N

PART NO.

AGZ183-03AAZ-N

TITLE.

2.2Pitch 9Pin SEAL Series Male Ass'y