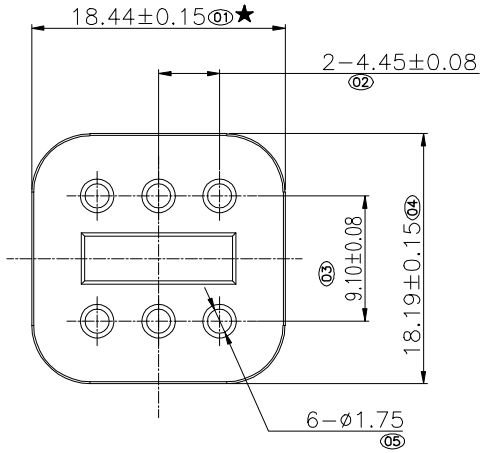

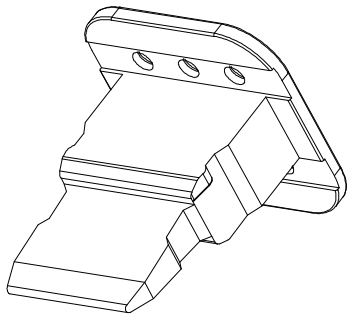

3D VIEW

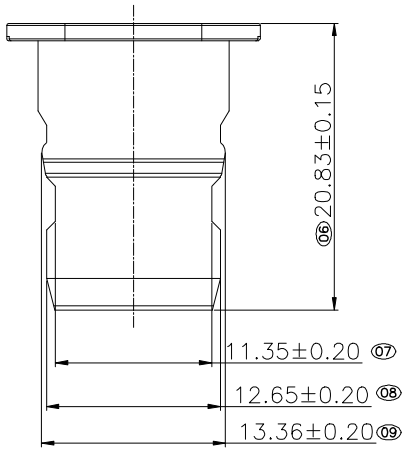

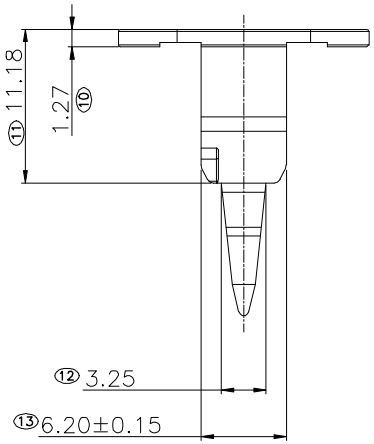

Specifications
Operating Temperature:−55°C to +125°C
Material:
Regular Thermoplastic: Only Suitable for Wave Soldering Process (PBT).
Color of Materil: Green
☆All materials must meet Greenconn requirement for environment protection.
"★": Critical Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
"☆": Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Greenconn Website:www.greenconn.com E−mail:sales@greenconn.com			3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. AGZ292−HA−N
				X.°±3.0°	X.±0.30			
				.X°±2.0°	.X±0.25	CHECKED:	DATE:	
				.XX°±1.0°	.XX±0.20			PART NO. AGZ292−06AAL−N
REV. A	UNIT. mm	SCALE. 2:1	PAGE. 1/1	.XXX°±0.5°	.XXX±0.15	APPROVED:	DATE:	

TITLE.
WEDGE LOCK FOR 6P CONTACT PLUG GT SERIES