

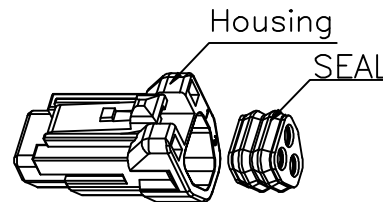
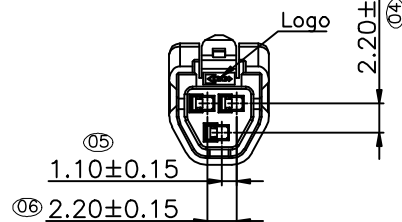


Section A-A

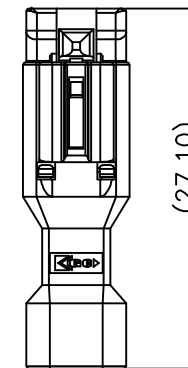

Mated Figure



Specifications

Current Rating 20 AWG: 3.5Amp/PIN
22 AWG: 3.0Amp/PIN
24 AWG: 2.0Amp/PIN
26 AWG: 1.0Amp/PIN

Voltage Rating: 250V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:650VAC
Contact Resistance:30mΩMax.
Operating Temperature:-40°C to +105°C

Materials
Insulator Material:Temperature
Thermoplastic, UL 94V-0 PBT
or the equivalent material

★ All materials must meet Greenconn hazardous substances control standards.

★: Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. C UNIT. mm SCALE. 3:2

3RD.ANG
PROJ.
3/4

PAGE. 1/1

GENERAL TOLERANCE

X'±3.0'	X±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

AHW082-HA

PART NO.

AHW082-03AAT-N

TITLE.

2.2Pitch 3Pin SEAL Series
Female Ass'y