

F

E

D

C

B

A

F


E

D

C

B

A

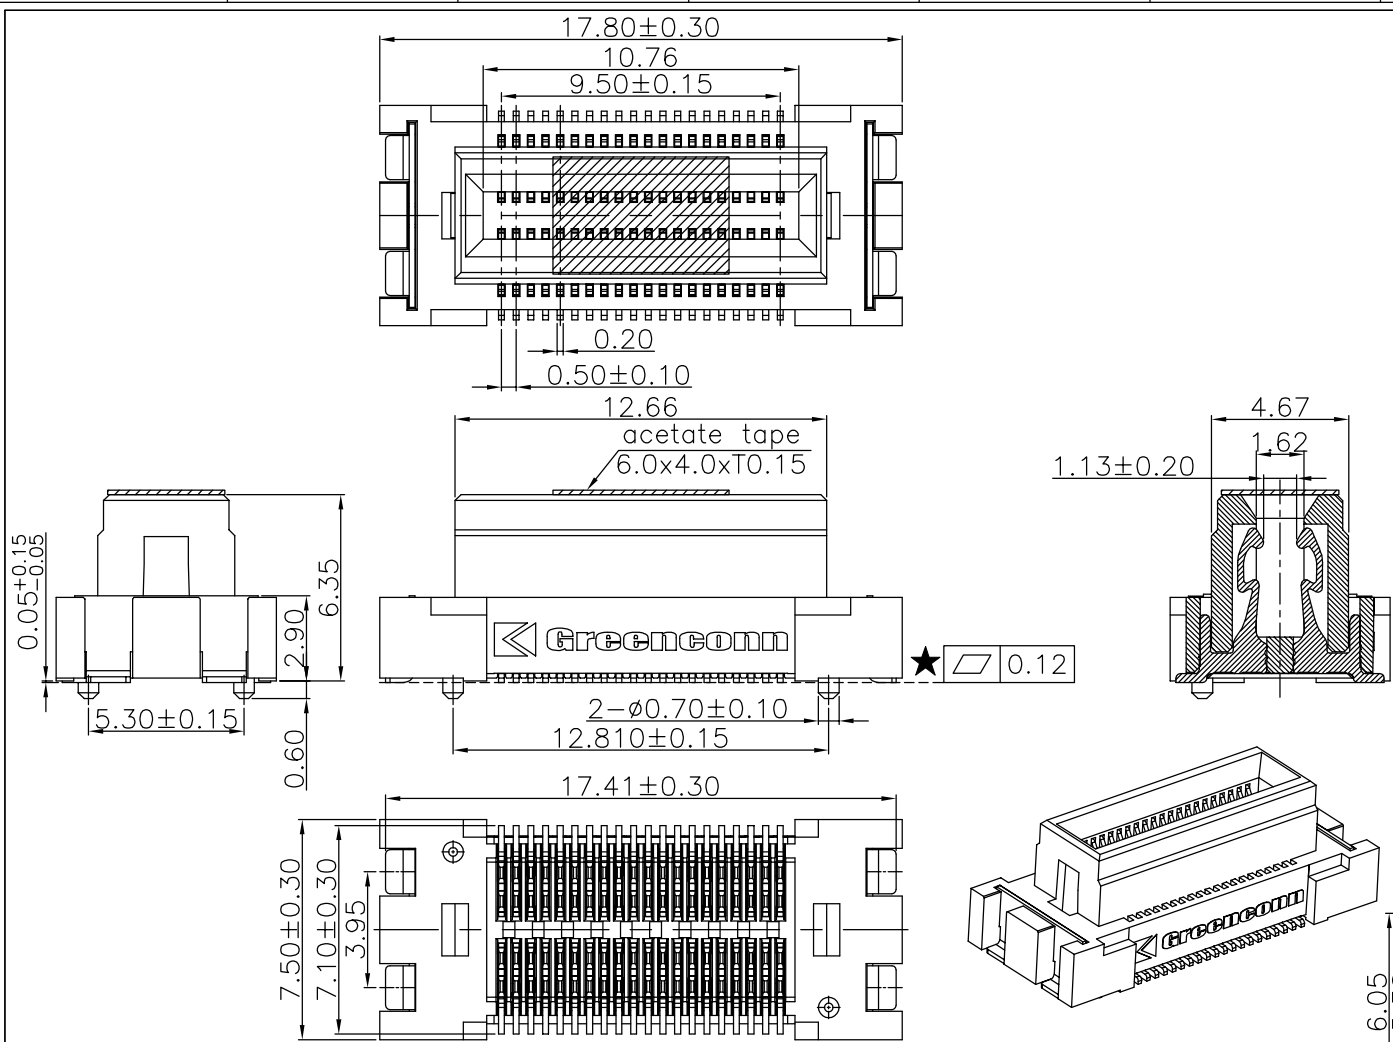


Specifications
Current Rating:0.4Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:250VAC/60S
Contact Resistance:100mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V−0 LCP or the equivalent material
★All materials must meet GREENCONN hazardous substances control standards.
“★”: Critical Characteristics. indicates product characteristics, functionalities, and manufacturing processes regarding to customer’s specifications
“☆”:Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information

C BAC229 – XX XX B 001 C 1 N X

No. of Pins per Row 20
Standard Plating 79=5u”AU/80~160u”MATTE TIN
75=0.6u”AU/80~160u”MATTE TIN
Color 1=Black
Standard Packing H=Acetate Tape+Tape&Reel

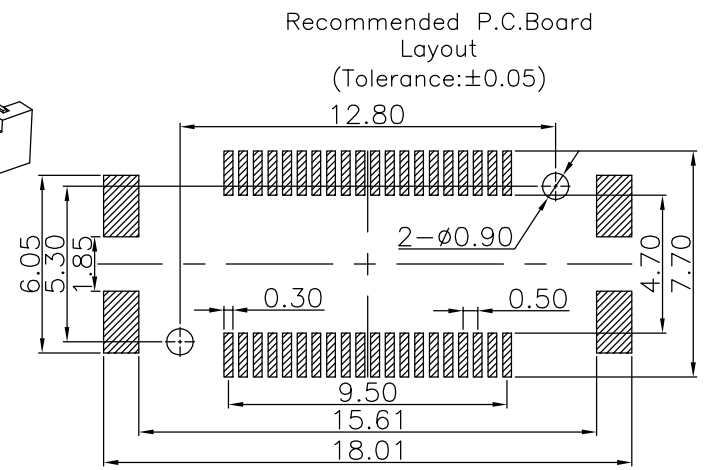

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ. PAGE. 1/1	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. CBAC229-CB1CN PART NO. CBAC229-20XXB001C1NX	TITLE. 0.5mm PITCH BTB FLOATING CONNECTOR
REV. A	UNIT. mm	SCALE. 4:1		X.*±5.0°	X.±0.30				
				.X*±3.0°	.X±0.25				
				.XX*±2.0°	.XX±0.15				
				.XXX*±1.0°	.XXX±0.10				