

1 2 3 4 5 6 7 8 9

F


E

D

C

B

A

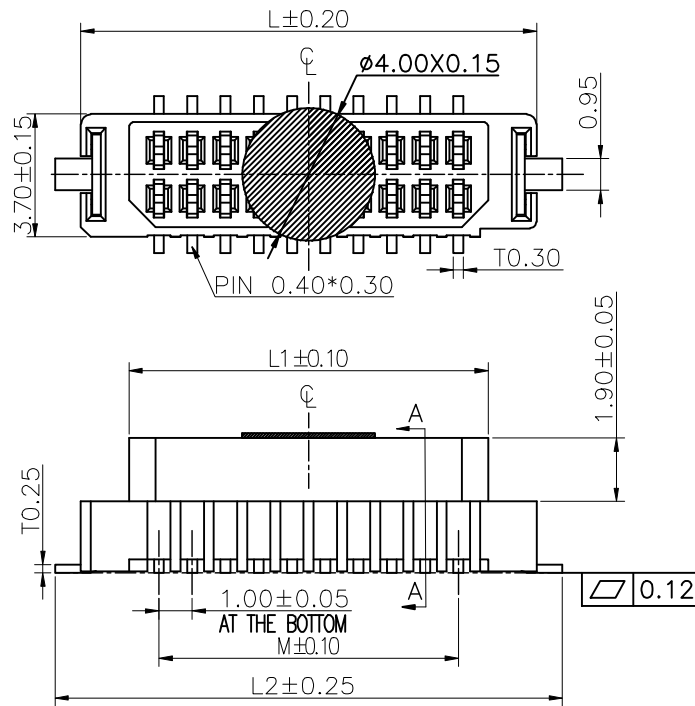

Specifications

Current Rating:1.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:300VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:

LCP(High temperature resistance),

UL 94V-0

All materials must meet Greenconn hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

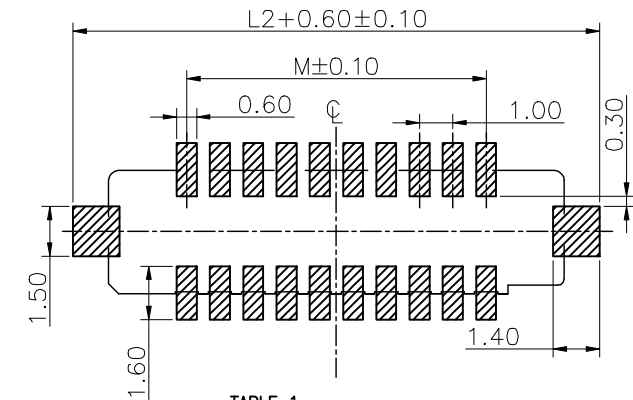
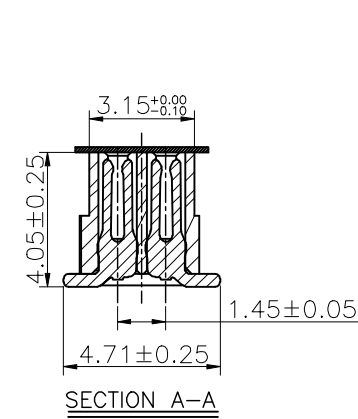


TABLE 1:

No. of PIN/ROW	Dimension Information			
	M	L1	L	L2
03	2.00	3.80	6.70	8.25
04	3.00	4.80	7.70	9.25
05	4.00	5.80	8.70	10.25
06	5.00	6.80	9.70	11.25
07	6.00	7.80	10.70	12.25
08	7.00	8.80	11.70	13.25
09	8.00	9.80	12.70	14.25
10	9.00	10.80	13.70	15.25
11	10.00	11.80	14.70	16.25
12	11.00	12.80	15.70	17.25
13	12.00	13.80	16.70	18.25
14	13.00	14.80	17.70	19.25
15	14.00	15.80	18.70	20.25

Ordering Information

CBCC201 - XX XX A XXX C

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code

No. of Pins per Row
03~15

Positioning column information
A=No locating post
B=Round post
C=Square post

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Pin length
See the drawing

Insulator Material
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
C=Tube
D=Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

格稜股份有限公司
Greenconn Corporation

REV.		UNIT.		SCALE.		PAGE.		DESIGNED:		DATE:		DWG. NO.		TITLE.	
01		mm		5:1		1/1		CHECKED:		DATE:		CBCC201-CAXX		1.00 PITCH	
								CO SIGEND:		DATE:		PART NO.		FEMALE BOARD TO BOARD	
								APPROVED:		DATE:		CBCC201-XXXX AXXX C1AX		SMT TYPE	

1 2 3 4 5 6 7 8 9