


1 2 3 4 5 6 7 8 9


F

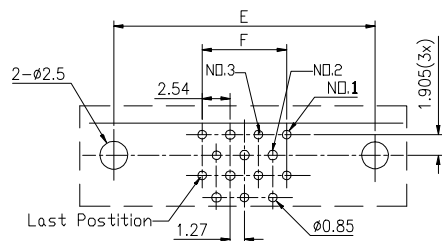

PCB Layout
(14,26,50 Pos)

E

D

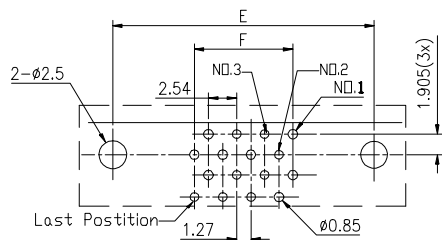

PCB Layout
(20,36,40,68,100 Pos)

C

B

Ordering Information





C DEA401 - XX XX A 001 A X B X

No. of Pins Row
See Table

Standard Plating
05=Gold Flash/Tin

Color
1=Black

Standard Packing
C=Tube

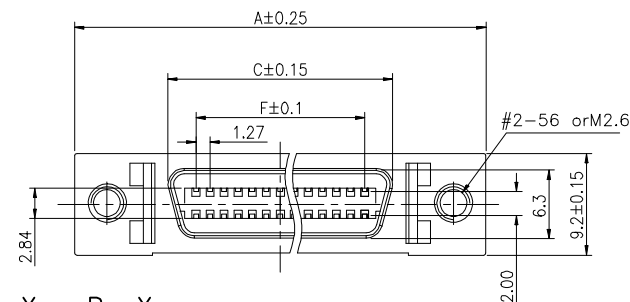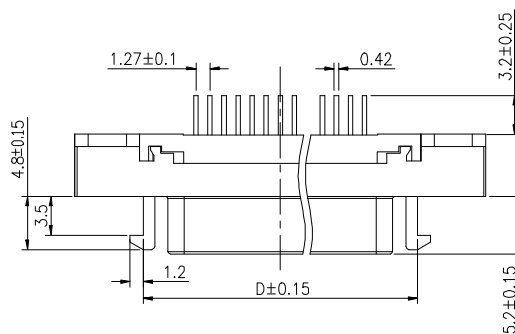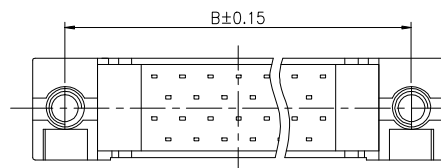

Specifications

Voltage Current Rating:1.0AMP.250V AC

Insulation Resistance:500MΩ Min.

Contact Resistance:30mΩ Max.

Dielectric Withstanding Voltage:500V AC

Temperature Range:-40℃ to +105℃

Materials

Contact Material:Brass

Insulation Material: Thermoplastic, UL94V-0 PBT

All materials must meet GREENCONN
hazardous substances control standards.

Table

No. of Pin	DIMENSIONS					
	A	B	C	D	E	F
14	29.51	23.64	12.6	17.25	23.64	7.62
20	33.32	27.45	16.43	21.06	27.45	11.43
26	37.13	31.26	20.24	24.76	31.26	15.24
36	43.48	37.61	26.5	31.11	37.61	21.59
40	46.08	40.15	29.14	33.30	40.15	24.13
50	52.37	46.5	35.39	40.0	46.5	30.48
68	64.00	57.92	46.90	51.00	57.92	41.91
100	84.18	78.23	67.14	71.50	78.23	62.23


A



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±5.0° X.±0.38

.X'±3.0° .X±0.35

.XX'±2.0° .XX±0.25

.XXX'±1.0° .XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CDEA401-CA001

PART NO.

CDEA401-XXXX A001AXBX

TITLE.

SCSI nP母头度直插板端

1 2 3 4 5 6 7 8 9