


**Specifications**  
 Current Rating: 3.0Amp AC/DC.  
 Insulation Resistance: 1000MΩ Min.  
 Voltage rating: 300V AC/DC.  
 Contact Resistance: 20mΩ Max.  
 Temperature rating: -25°C to +105°C.

**Materials**  
 Contact Material: Phosphor Bronze  
 Shell material: Spcc.  
 Boardlock: Copper Alloy/Under plating Ni(50~200μ"),  
 Over plating Sn (80~200μ").  
 Insulator Material: Polyester UL94V-0  
 PBT Or Equivalent material.  
 All materials must meet Greenconn  
 requirement for environment protection.

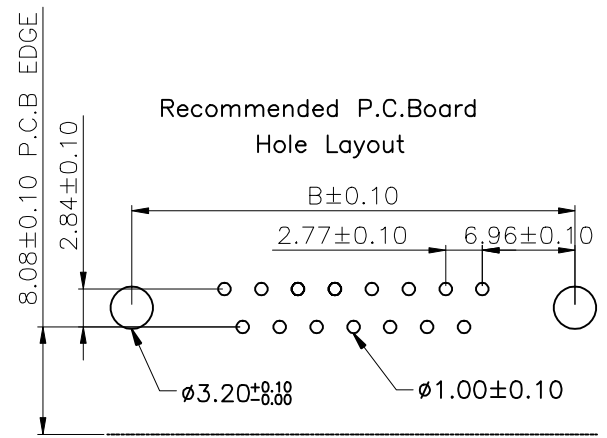

**Ordering Information**

C DZB202 - XX XX A 004 A X A X

No. of Pins per Row  
09 15 25 37

Standard Plating  
02=Gold Flash  
Selective Plating  
01=Tin  
05=Gold Flash/Tin  
55= 15u" Gold/Tin  
58= 30u" Gold/Tin

Color  
1=Black  
6=GRAY  
7=BLUE

Standard Packing  
B=Tray  
Selective Packing  
C=Tube

NO. of PIN/ROWS	Dimension Lnfomation		
	A±0.15	B±0.15	C±0.30
09	16.33	24.99	30.80
15	24.66	33.32	39.10
25	38.38	47.04	53.00
37	54.82	63.50	69.30

**格稜股份有限公司**  
**Greenconn Corporation**

GENERAL TOLERANCE	
X.' ±5.0'	X. ±0.30
.X' ±3.0'	.X ±0.25
.XX' ±2.0'	.XX ±0.15
.XXX' ±1.0'	.XXX ±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.  
CDZB202-CA4AA

PART NO.  
CDZB202-XXXX A004AXAX

TITLE.  
D-SUB SERIES  
0.318" FEMALE

REV. 09	UNIT. mm	SCALE. 2:1	PAGE. 1/1	
---------	----------	------------	-----------	--