



F
E
D
C
B
A

1 2 3 4 5 6 7 8 9

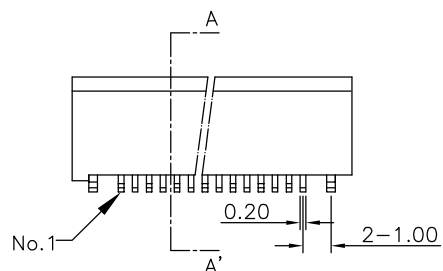



No. pins	Dim. Info.		
	M	L1	L
08	3.5	4.56	7.0
10	4.5	5.56	8.0
12	5.5	6.56	9.0
14	6.5	7.56	10.0
16	7.5	8.56	11.0
20	9.5	10.56	13.0
22	10.5	11.56	14.0
24	11.5	12.56	15.0
25	12.0	13.06	15.5
26	12.5	13.56	16.0

Specifications

Current Rating: 0.5Amp
Rated Voltage: 50V
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 500V AC/DC
Contact Resistance: 30mΩ Max.
Operating Temperature: -25°C to +85°C


Materials

Contact Material: Phosphor Bronze
Insulation Material: High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material.
Solder tab: Phosphor bronze, tin/lead-plated
All materials must meet Greenconn
requirement for environment protection




Ordering Information

C FAC111 - XX XX A 001 C X A X
No. of Pins per Row 14,24
Standard Plating 01=Tin
Selective Plating 02=Gold Flash 05=Gold Flash/Tin
Color 1=Black ...
Standard Packing E=Tube(Manufacture+Cap)
Selective Packing F=Tape Reel(Manufacture+Cap)

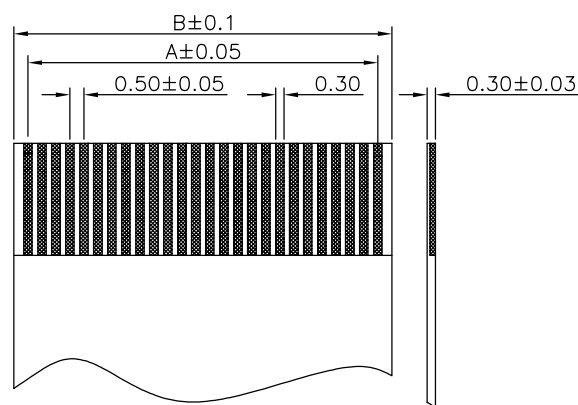

DIMENSION FOR FPC

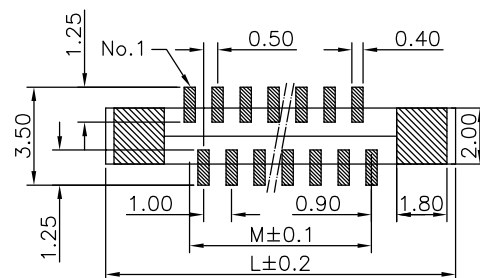

PCB LAYOUT

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.* ± 1.5*	X. ± .
.X* ± 1.0*	.X ± 0.30
.XX* ± 0.5*	.XX ± 0.20
.XXX* ± 0.3*	.XXX ± 0.10

DESIGN:

DATE:

CHECKED:

DATE:

AUDITED:

DATE:

DWG. NO.

CFAC111-CA1CA

PART NO.

CFAC111-XXXXA001CXAX

TITLE.

PITCH 0.50mm FPC
NON-ZIF

REV.	UNIT.	SCALE.	PAGE.	
D1	mm	4:1	1/1	

1 2 3 4 5 6 7 8 9

F
E
D
C
B
A

F

E

D

C

B

A

F




E

D

C

B

A

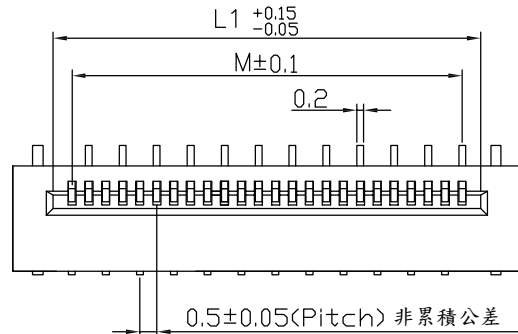

A-A



Specifications

Current Rating: 0.5Amp
Rated Voltage: 50V
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 500V AC/DC
Contact Resistance: 30mΩ Max.
Operating Temperature: -25°C to +85°C


Materials

Contact Material: Phosphor Bronze
Insulation Material: High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material.

Fitting Nail: Phosphor bronze
All materials must meet Greenconn
requirement for environment protection

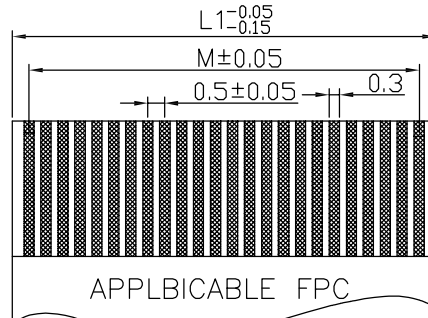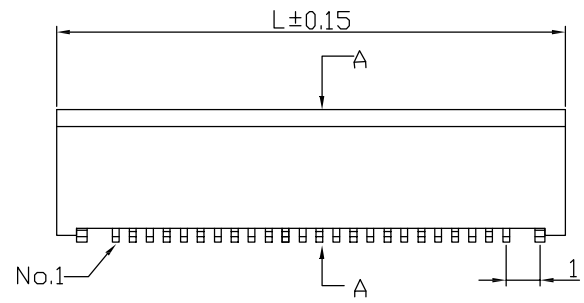

0.3±0.03

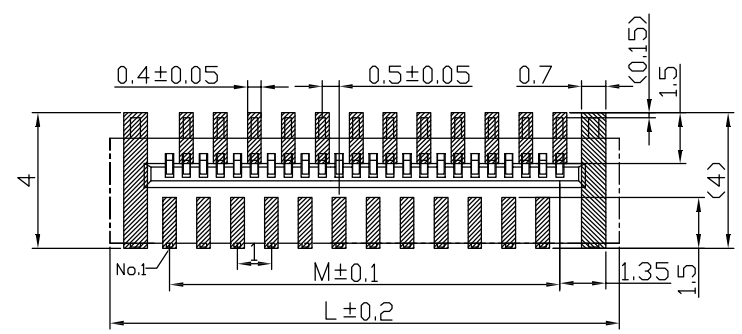

RECOMMENDED PCB LAYOUT

No. pins	Dim. Info.		
	M	L1	L
08	3.5	4.56	7.0
10	4.5	5.56	8.0
12	5.5	6.56	9.0
14	6.5	7.56	10.0
16	7.5	8.56	11.0
20	9.5	10.56	13.0
22	10.5	11.56	14.0
24	11.5	12.56	15.0
25	12.0	13.06	15.5
26	12.5	13.56	16.0
32	15.5	16.56	19.0

Ordering Information

C FAC111 - XX XX A 003 C X A X
No. of Pins per Row 10,14,20,24,40
Standard Plating 01=Tin
Selective Plating 02=Gold Flash 05=Gold Flash/Tin
Color 2=White ...
Standard Packing C=Tube Selective Packing D=Tape Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE		DESIGN: CHECKED: AUDITED:	DATE: DATE: DATE:	DWG. NO.	TITLE.	
X.* ± 1.5*	X. ± .			CFAC111—CA3CA		
.X* ± 1.0*	.X ± 0.30			PART NO.		
.XX* ± 0.5*	.XX ± 0.20					CFAC111—XXXXA003CXAX
.XXX* ± 0.3*	.XXX ± 0.10					
			PITCH 0.50mm FPC 立貼正腳			

PITCH 0.50mm FPC
立貼正腳