


Ordering Information

CFAC146 - XX XX A 006 C X A X

No. of Pins per Row See Table Standard Plating 01=Tin Color 2=White Standard Packing D=Tape Reel

Table:

No. of PIN/ROW	Dimension Information			No. of PIN/ROW	M	L1	L
	M	L1	L				
04	1.50	2.56	8.00				
05	2.00	3.06	8.50	34	16.50	17.56	23.00
06	2.50	3.56	9.00				
08	3.50	4.56	10.00				
10	4.50	5.56	11.00				
				40	19.50	20.56	26.00
12	5.50	6.56	12.00				
13	6.00	7.06	12.50				
14	6.50	7.56	13.00				
15	7.00	8.06	13.50				
16	7.50	8.56	14.00				
18	8.50	9.56	15.00				
20	9.50	10.56	16.00				
				50	24.50	25.56	31.00
22	10.50	11.56	17.00				
24	11.50	12.56	18.00				
25	12.00	13.06	18.50	54	26.50	27.56	33.00
26	12.50	13.56	19.00				
28	13.50	14.56	20.00				
30	14.50	15.56	21.00				
32	15.50	16.56	22.00				

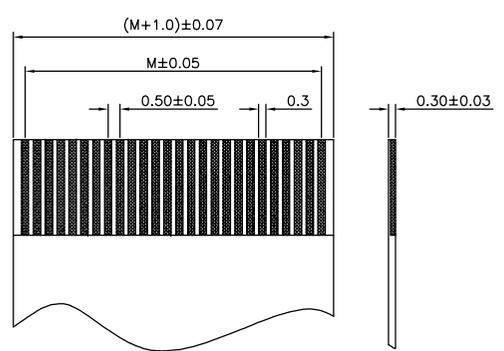

適用FPC寸法
APPLICABLE FPC

Specifications
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 500V, AC/minute
 Contact Resistance: 0.03Ω Max.
 Rating voltage: 50V, AC, DC
 Operating Temperature: -25°C to +85°C

Materials
 Contact Material: Phosphor Bronze
 Fitting Nail: Phosphor Bronze
 Housing: High Temperature Thermoplastic
 UL 94V-0 LCP
 Actuator: PPS(UL94V-0)
 All materials must meet Greenconn hazardous substances control standards.

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO. CFAC146-CA6CA
PART NO. CFAC146-XXXXA006CXAX

TITLE:
0.5 臥貼 FPC 下接

REV. A1	UNIT. mm	SCALE. 1:1	PAGE. 1/1	
---------	----------	------------	-----------	--