

1 2 3 4 5 6 7 8 9

F



E

D




C

B



A

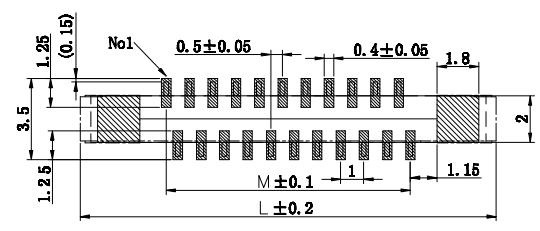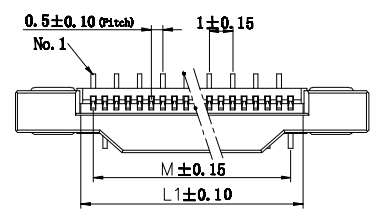

适用线路板
RECOMMENDED PCB LAYOUT

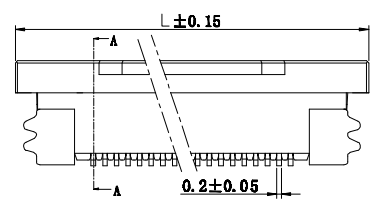

SECTION A-A

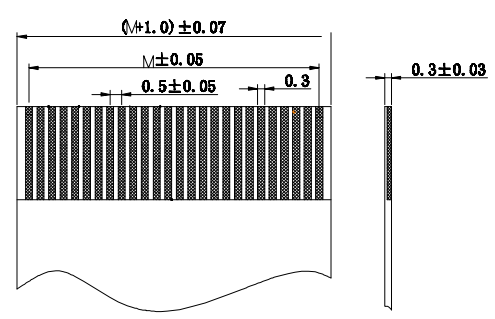

适用FPC寸法
APPLICABLE FPC

NOTES:

MATERIAL;
CONTACT: Phosphor Bronze
FITTING NAIL: Phosphor Bronze
HOUSING: LCP UL94V-0
ACTUATOR: LCP UL 94V-0
PLATING: SEE PART NUMBER

RATING
OPERATING TEMPERATURE: -25~85°C
OPERATING VOLTAGE: 50V AC/DC
CURRENT RATING: 0.5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
INSULATION RESISTANCE: 500MΩ Min;
CONTACT RESISTANCE: 0.03Ω Max;

TABLE:

No. of Contacts	Dimension Information		
	M	L1	L
11	5	6.06	11.7
12	5.5	6.56	12.2
13	6	7.06	12.7
14	6.5	7.56	13.2
15	7	8.06	13.7
16	7.5	8.56	14.2
17	8	9.06	14.7
18	8.5	9.56	15.2
19	9	10.06	15.7
20	9.5	10.56	16.2
21	10	11.06	16.7
22	10.5	11.56	17.2
23	11	12.06	17.7
24	11.5	12.56	18.2
25	12	13.06	18.7
26	12.5	13.56	19.2
27	13	14.06	19.7
28	13.5	14.56	20.2
29	14	15.06	20.7
30	14.5	15.56	21.2
31	15	16.06	21.7
32	15.5	16.56	22.2
33	16	17.06	22.7
34	16.5	17.56	23.2
35	17	18.06	23.7
36	17.5	18.56	24.2
37	18	19.06	24.7
38	18.5	19.56	25.2
39	19	20.06	25.7
40	19.5	20.56	26.2
41	20	21.06	26.7
42	20.5	21.56	27.2
43	21	22.06	27.7
44	21.5	22.56	28.2
45	22	23.06	28.7
46	22.5	23.56	29.2
47	23	24.06	29.7
48	23.5	24.56	30.2
49	24	25.06	30.7
50	24.5	25.56	31.2
51	25	26.06	31.7
52	25.5	26.56	32.2
53	26	27.06	32.7
54	26.5	27.56	33.2
55	27	28.06	33.7
56	27.5	28.56	34.2
57	28	29.06	34.7
58	28.5	29.56	35.2
59	29	30.06	35.7
60	29.5	30.56	36.2

Ordering Information

C FAC153 - XX XX A 001 C X A X
No. of Pins per Row See table
Selective Plating 02=Gold Flash Selective Plating 01=Tin
Color 1=Black 2=White
Standard Packing D=Tape&Reel

Green conn
Website: www.greenconn.com
E-mail: sales@greenconn.com
REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±/
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.10

DESIGNED: DATE:
CHECKED: DATE:
APPROVED: DATE:

DWG. NO. CFAC153-CA001
PART NO. CFAC153-XXXXA001CXAX

TITLE.
0.5mm FPC CONN. 21F SMT DRAWER
H=2.65 VERTICAL CONTACT

1 2 3 4 5 6 7 8 9