

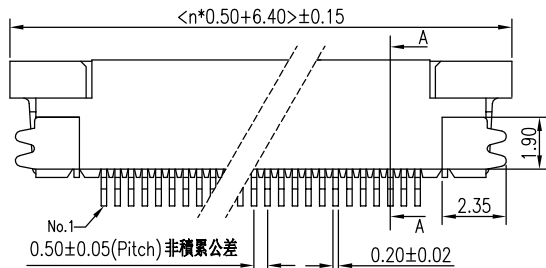



1 2 3 4 5 6 7 8 9

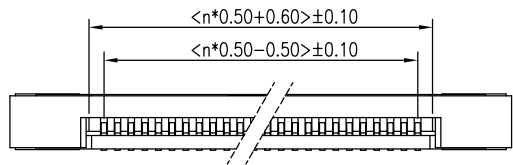

Ordering Information




CFAD102 - XX XX A 030 F X A X

No. of Pins
06~39

Standard Plating
01=Tin
Selective Plating
02=Gold Flash
05=Gold Flash/Tin

Color
2=White

Standard Packing
C=Tube
Selective Packing
D=Tape

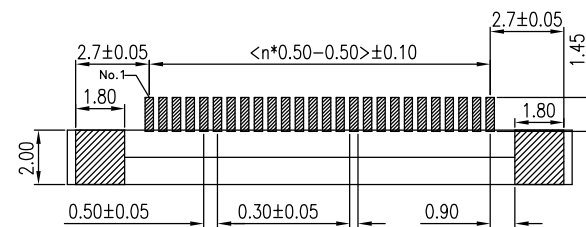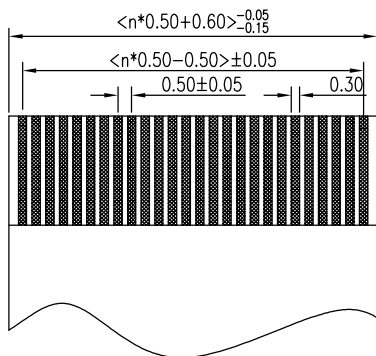

適用線路板

RECOMMENDED PCB LAYOUT

適用FPC寸法
APPLICABLE FPC

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.* ± 1.5°	X. ± 0.30
.X* ± 1.0°	.X ± 0.20
.XX* ± 0.5°	.XX ± 0.15
.XXX* ± 0.3°	.XXX ± 0.10

DESIGN:

DATE:

DWG. NO.

CFAD102-CA30FA

TITLE.

PITCH 0.5 mm FPC SMT
BOTTOM CONTACT

PART NO.

CFAD102-XXXXA030F2AX

REV.

08

UNIT.

mm

SCALE.








4:1

PAGE.

1/1



1 2 3 4 5 6 7 8 9

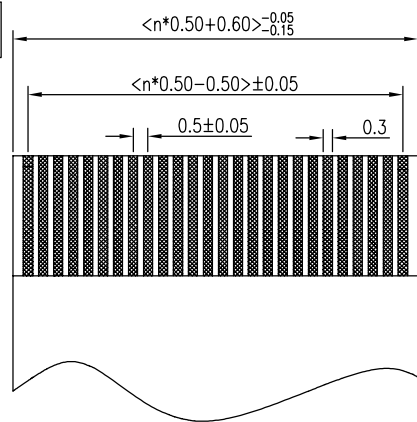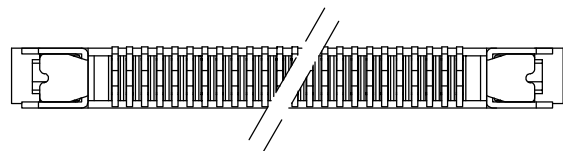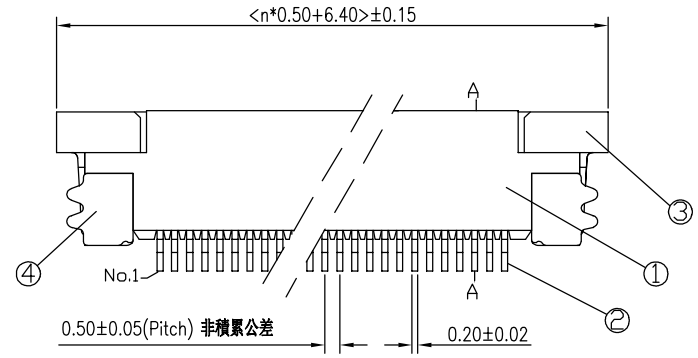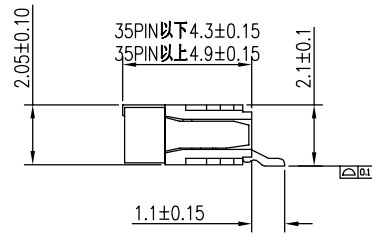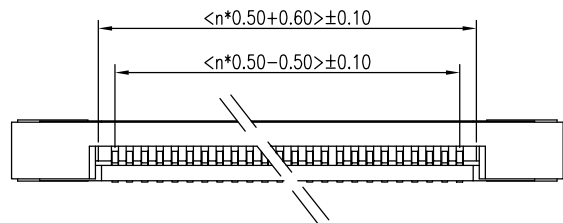

Specifications

Insulation Resistance: 500MΩ Min.
Withstand Voltage: 500V AC/Minute
Contact Resistance: 30mΩ Max.
Operating Temperature: -25°C to +85°C

Materials

- ① Insulator Material: High Temperature, Thermoplastic UL94V-0 Nylon46 or the equivalent material
- ② Contact Material: Phosphor Bronze
- ③ Actuator: UL94V-0 PPS
- ④ Clip: Phosphor bronze

All materials must meet Greenconn requirement for environment protection.

Ordering Information

CFAD102 - XX XX A 030 F X A X

No. of Pins 40~60


Standard Plating 01=Tin
Selective Plating 02=Gold Flash
05=Gold Flash/Tin

Color 2=White

Standard Packing C=Tube
Selective Packing D=Tape

適用FPC寸法
APPLICABLE FPC

適用線路板
RECOMMENDED PCB LAYOUT

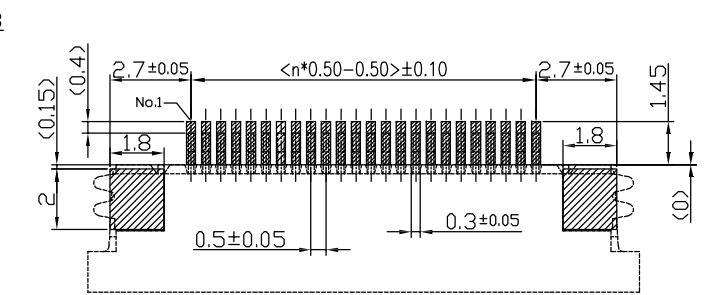

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.* ± 1.5*	X. ± 0.30
.X* ± 1.0*	.X ± 0.20
.XX* ± 0.5*	.XX ± 0.15
.XXX* ± 0.3*	.XXX ± 0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO. CFAD102-CA30FA
PART NO. CFAD102-XXXXA030F2AX

TITLE. PITCH 0.5 mm FPC SMT BOTTOM CONTACT
--

REV. 07	UNIT. mm	SCALE. 4:1	PAGE. 1/1	
------------	-------------	---------------	--------------	--