

1 2 3 4 5 6 7 8 9

F




E

D


C

B



A

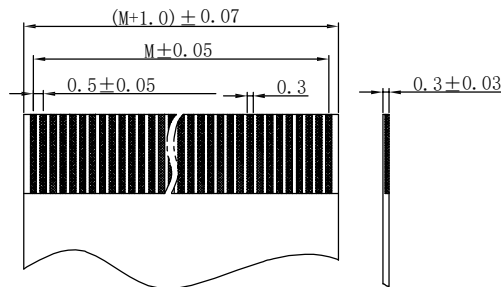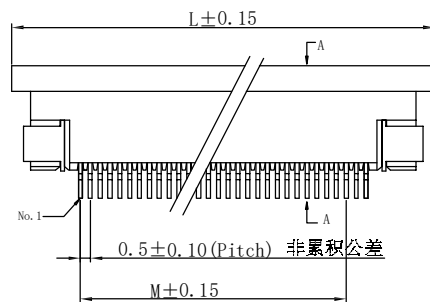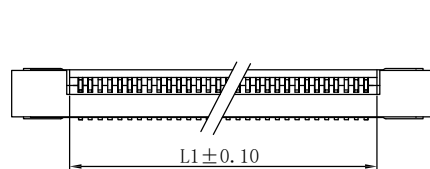

适用FPC寸法
APPLICABLE FPC

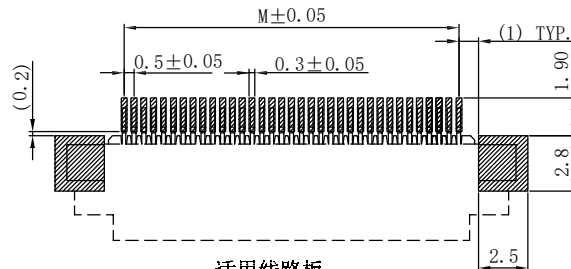

适用线路板
RECOMMENDED PCB LAYOUT



NOTES:

MATERIAL;
CONTACT: Phosphor Bronze
FITTING NAIL: Phosphor Bronze
HOUSING: LCP UL94V-0
ACTUATOR: LCP UL 94V-0
PLATING: SEE PART NUMBER

RATING

OPERATING TEMPERATURE: -25~85°C
OPERATING VOLTAGE: 50V AC/DC
CURRENT RATING: 0.5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
INSULATION RESISTANCE: 500MΩ Min;
CONTACT RESISTANCE: 0.03Ω Max;

TABLE:

No. of Pins	Dimension Information		
	M	L1	L
40	19.5	20.56	26.5
45	22	23.06	29
50	24.5	25.56	31.5
60	29.5	30.56	36.5

Ordering Information

C FAD102 - XX XX A 054 C X

No. of Pins per Row
See table

Selective Plating
02=Gold Flash
Selective Plating
01=Tin

Color
1=Black
2=White

A X


Standard Packing
D=Tape&Reel
Selective Packing
C=Tube



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X' ± 5.0'	X ± /
.X' ± 3.0'	.X ± 0.30
.XX' ± 2.0'	.XX ± 0.20
.XXX' ± 1.0'	.XXX ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CFAD102-CA054

PART NO.

CFAD102-XXXX A054CXAX

TITLE.

0.5mm FPC CONN. ZIF SMT FRONTFLIP
H=2.5 UPPER CONTACT

1 2 3 4 5 6 7 8 9