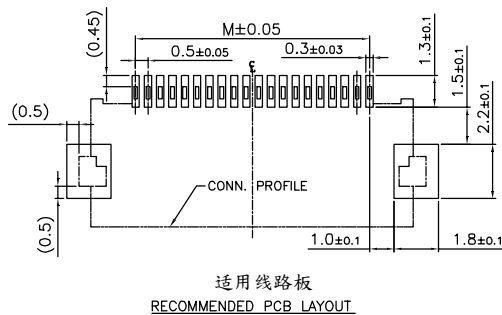
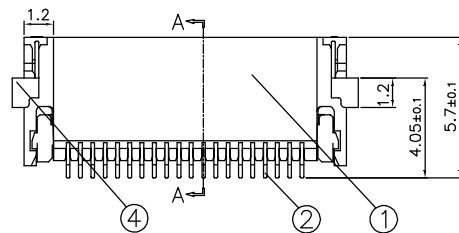
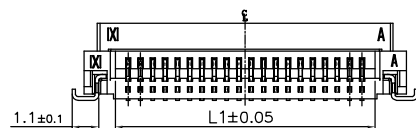
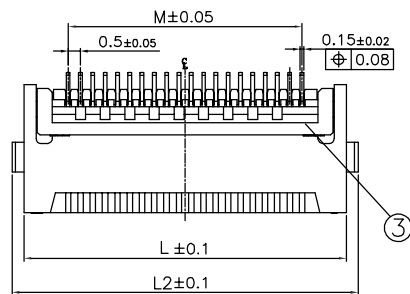


Specifications
 Operating Temperature: -40°C to +105°C
 Operating Voltage: 50V AC/DC
 Current Rating: 0.5Amp
 Dielectric Withstanding Voltage: 500VAC/Minute
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 0.03Ω Max
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: LCP UL94V-0
 All materials must meet GREENCONN hazardous substances control standards.

CIRCUITS	M	L1	L	L2
08	3.5	4.56	7.1	8.1
12	5.5	6.56	9.1	10.1
24	11.5	12.56	15.1	16.1
30	14.5	15.56	18.1	19.1

Ordering Information

C FAD103 - XX

No. of Pins per Row
08/12/24/30

XX

Standard Plating
02=Gold Flash
Selective Plating
05=Gold Flash/Tin

A

001

C

Color
2=White

X

Standard Packing
D=Tape&Reel
Selective Packing
C=Tube

S

X

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.*±3.0°	X.±
.X.*±1.0°	.X±0.25
.XX.*±	.XX±0.15
.XXX.*±	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CFAD103-CA1CS

PART NO.

CFAD103-XXXXA001CXSX

TITLE.

Pitch 0.5 FPC 90° SMT

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1